

# 18' X 41'7 1/2" MOUNTAIN POND LEFT

ACCEPTED BY


A	18'	K	6'
B	41'7 1/2"	L	14'
D	3'4"	M	17'7 1/2"
E	4'8"	M2	-
F	8'	T	-
G	10'	S	-
H	4'	N	-
I	4'	P	-
J	4'	U	-

APSP TYPE

II

SQ. FOOTAGE

928

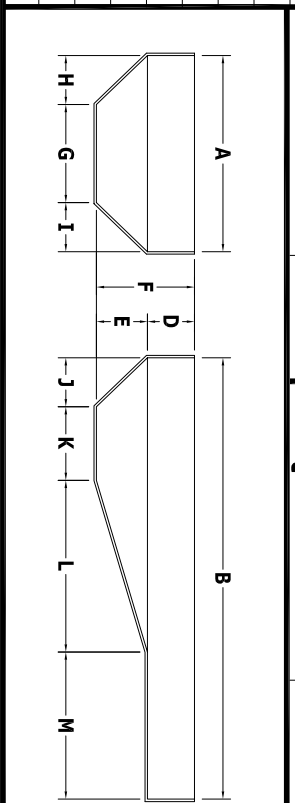

PURCHASE ORDER

MILLER


DATE

--	--

## BILL OF MATERIALS

QTY	PART	DESCRIPTION
2	HP318	58" SPECIAL PANEL
1	HP304	4' PANEL
1	HP302	2' PANEL
1	HP301	1' PANEL
1	HP382	CUSTOM 1'10" PANEL
12	HP359	9R PANEL
1	HP359LL	9R PANEL (LIGHT)
2	HP359A	9R PANEL (AG)
1	HP110D	(9R) 2' OVAL INSERT
10	HP319N	9R REVERSE
1	H01576	45° WEDGE
3	HP126	5° WEDGE
32	HP599	BRACE
1	HS106N	RADIUS 8' STEP

## OVERDIG DETAIL

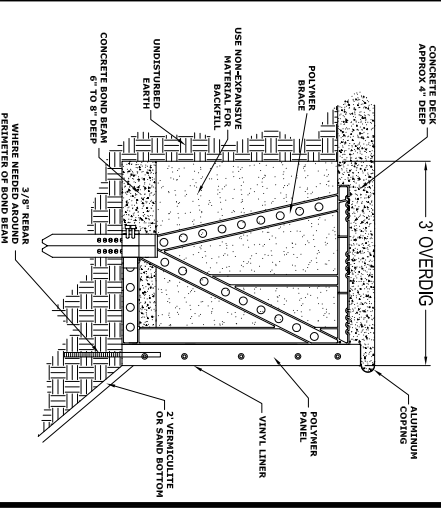

\* NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO. \*

## NO DIVING WARNING

NO DIVING WARNING STICKERS MUST BE INSTALLED IN NO DIVING AREAS ACCORDING TO APSP SPECIFICATIONS



## PRE-CUT PANEL LEGEND



## GENERAL NOTES


1. These are finished dimensions ready for the liner.
2. Dimensions are from inside pool panels.
3. The ideal water level should be to the middle of the skimmer opening(s).

## EXCAVATION NOTES

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See Over Dig Detail for excavation around pool.
5. Fill voids under base of panels and lamp well.
6. Backfill with non-expansive material.

## ADDITIONAL NOTES

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. The dealer or contractor who sells or installs your pool is an independent contractor and is not an agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of construction. Proper installation is the responsibility of the dealer/contractor.

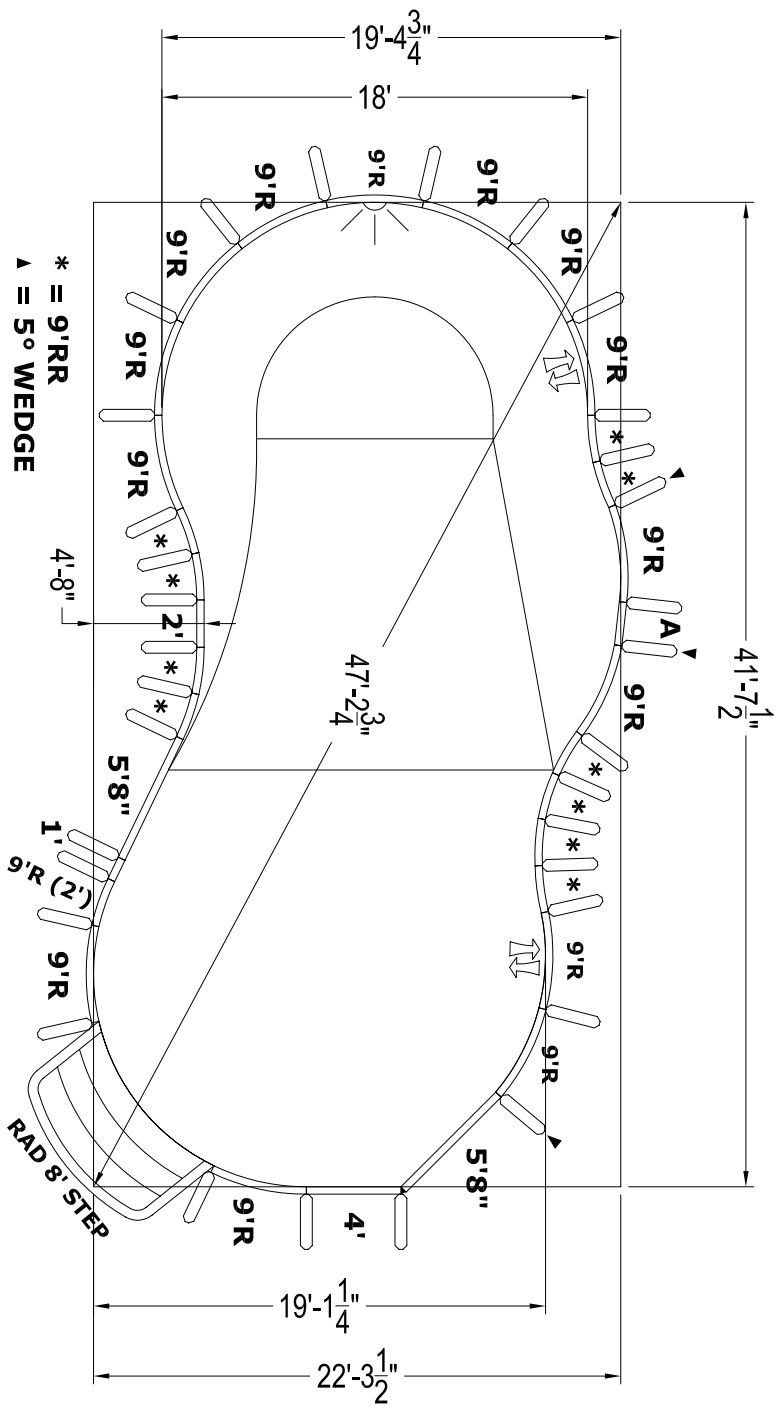

\* = 9'R  
▲ = 5° WEDGE

DATE: SEP 2006

PANEL LINE: CORNERSTONE

DRAWING NUMBER: MP18419R8C-MILLER

543 South Main Street - Sweetwater, TN 37874

Copyright © 2005 by Hydra Pools.