23'3" X 45'4" OASIS

ACCEPTED BY	
DATE	
PURCHASE ORDER	CROGAN

A	18'7"	K	8'6"
B	45'4"	L	14'
D	3'4"	M	18'10"
E	4'8"	M2	-
F	8'	T	-
G	10'7"	S	-
H	4'	N	-
I	4'	P	-
J	4'	U	-

APSP TYPE	II	SQ. FOOTAGE	1054

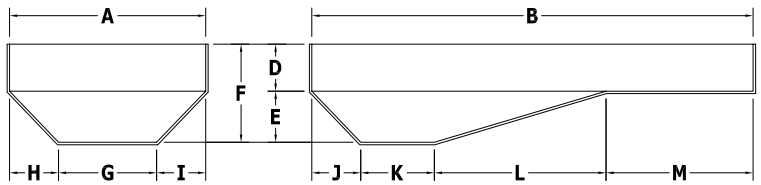

BILL OF MATERIALS CONT'D		
40	HP599	BRACE
1	HS110N	8' TWIN SEAT STEP

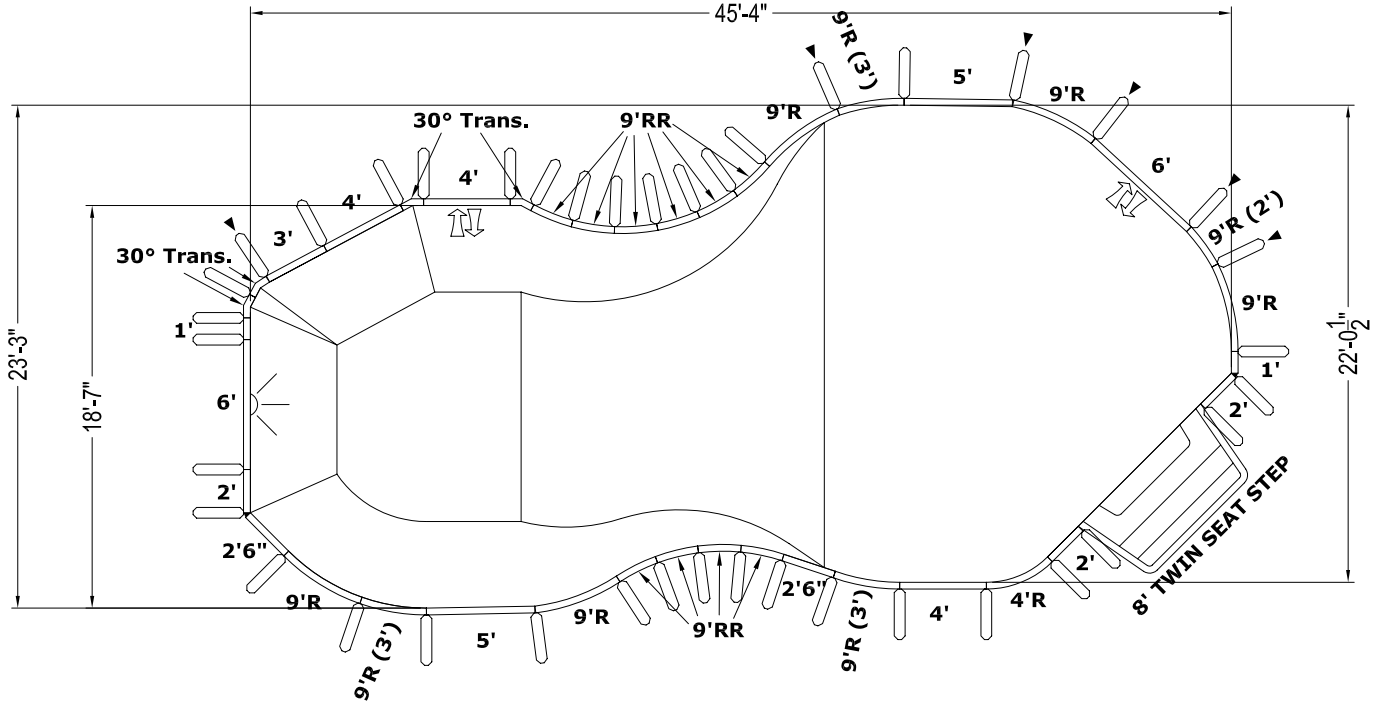

BILL OF MATERIALS

QTY.	PART	DESCRIPTION
1	HP506L	6' PANEL (LIGHT)
1	HP506A	6' PANEL (A/G)
2	HP505	5' PANEL
2	HP504	4' PANEL
1	HP504A	4' PANEL (A/G)
1	HP503	3' PANEL
2	HP583S	2'6" SPECIAL PANEL
3	HP502	2' PANEL
2	HP501	1' PANEL
5	HP359	9'R PANEL
3	HP125D	(9'R) 3' ROMAN INSERT
1	HP110D	(9'R) 2' OVAL INSERT
10	HP319N	9'R REVERSE
1	HP354	4'R PANEL
4	HP521	30° LAZY-ELL PANEL
2	H01576	45° WEDGE
6	HP126	5° WEDGE

PANEL SHELF DETAIL

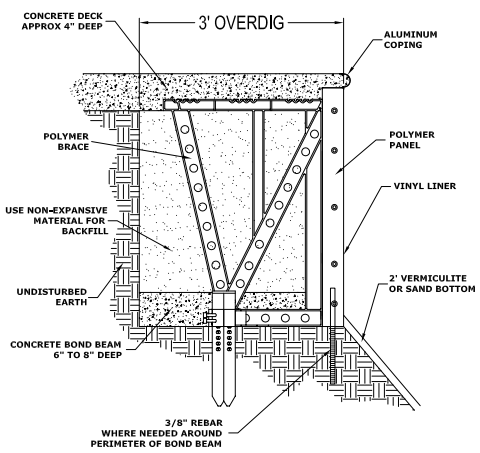

NO DIVING WARNING

'NO DIVING' WARNING STICKERS MUST BE INSTALLED IN NO DIVING AREAS ACCORDING TO NSPI SPECIFICATIONS

PRE-CUT PANEL LEGEND

GENERAL NOTES

1. These are finished dimensions ready for the liner.
2. Dimensions are from inside pool panels.
3. The water level should be no more than 6" below the coping receptor (hangtab) slot.

EXCAVATION NOTES

1. Rough excavation should be 2" to 3" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Panel Shelf Detail' for excavation around pool.
5. Fill voids under base of panels and tamp well.
6. Backfill with non-expansive material.

ADDITIONAL NOTES

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.
The dealer or contractor who sells or installs your pool is an independant contractor and is not an agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of construction. Proper installation is the responsibility of the dealer/builder/contractor.

HYDRA POOLS
543 South Main Street - Sweetwater, TN 37874

DATE	PANEL LINE	DRAWING NUMBER
MAY 2007	PINNACLE	OA23459R8P-CROGAN-1

Copyright © 2005 by Hydra Pools.