


23'3" X 37'5 1/4" LAGOON RIGHT

ACCEPTED BY


DATE

PURCHASE ORDER

JOBNAME

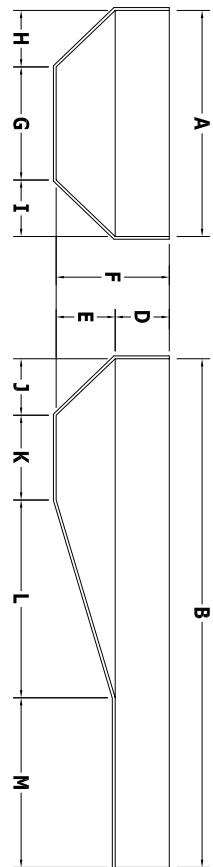


SIZE	A	B	D	E	F	G	H	I	J	K	L	M
23'3" X 37'5 1/4"	23'3"	37'5 1/4"	3'4"	4'8"	8"	VAR	4"	4"	4"	6"	VAR	9'2"

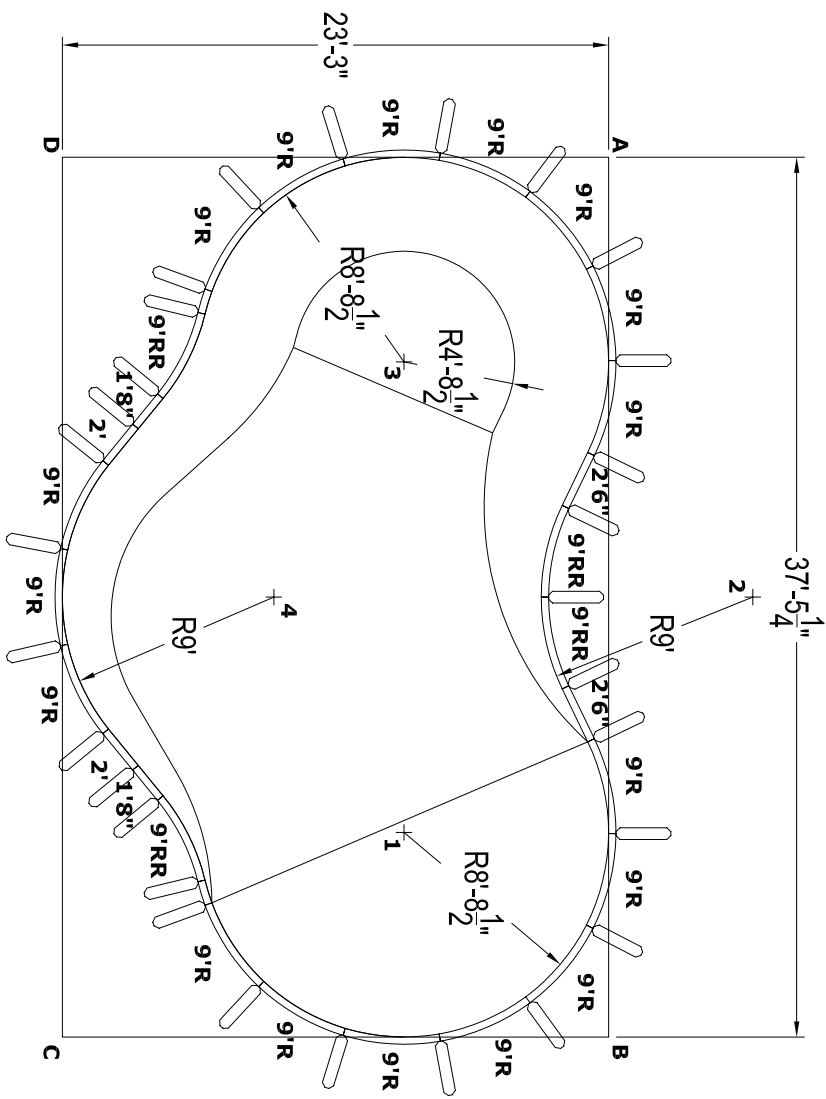

LAYOUT DIMENSIONS

A-C	44'3 1/4"
A-2	19'8 1/4"
A-3	12'3 3/4"
B-1	12'3 3/4"
B-2	19'8 1/4"
C-1	16'11 1/4"
C-4	20'9 1/4"
D-3	16'11 1/4"
D-4	20'9 1/4"
1-2	17'10 3/4"
1-3	20' 1/4"
1-4	11'7 1/4"
2-3	17'10 3/4"
3-4	11'7 1/4"



BILL OF MATERIALS

QTY	PART	DESCRIPTION
2		26" SPECIAL PANEL
2		2" PANEL
2		18" SPECIAL PANEL
17		6" RADIUS
2		9R 1" INSERT
4		REVERSE 9 RADIUS
29		BRACE

GENERAL NOTES

1. These are finished dimensions ready for the liner.
2. Dimensions are from inside pool panels.
3. The water level should be no more than 6" below the coping receptor (hangtab) slot.

EXCAVATION NOTES

1. Rough excavation should be 2" to 3" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See Panel Shelf Detail for excavation around pool.
5. Fill voids under base of panels and ramp well.
6. Backfill with non-expansive material.

ADDITIONAL NOTES

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. The dealer or contractor who sells or installs your pool is an independent contractor and is not an agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of construction. Proper installation is the responsibility of the dealer/distributor/contractor.



543 South Main Street - Sweetwater, TN 37874

DATE
NOV 2005

PANEL LINE
PINNACLE

DRAWING NUMBER
LGR23378-0001