
## 12' X 24' RECTANGLE 6" RADIUS - WEDGE

샹

SQ. FOOTAGE

288

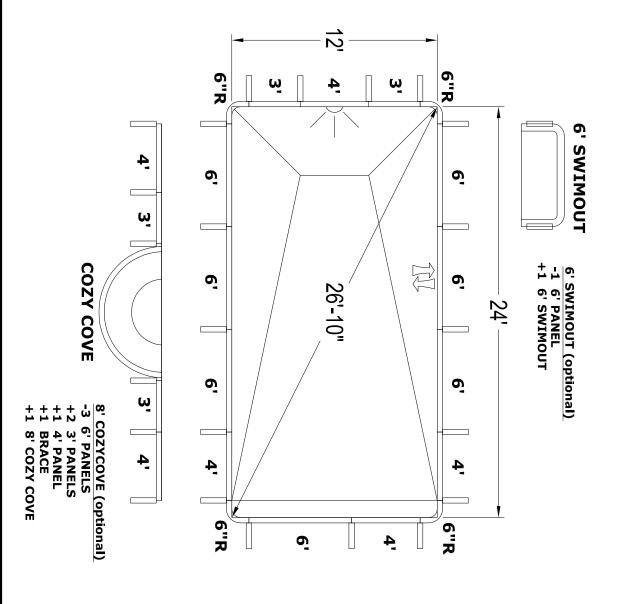

8'


**STEP** 

-1 6' PANEL 8' STEP (optional)

+2 1' PANEL -1 4' PANEL

+1 8' STEP

+1 BRACE

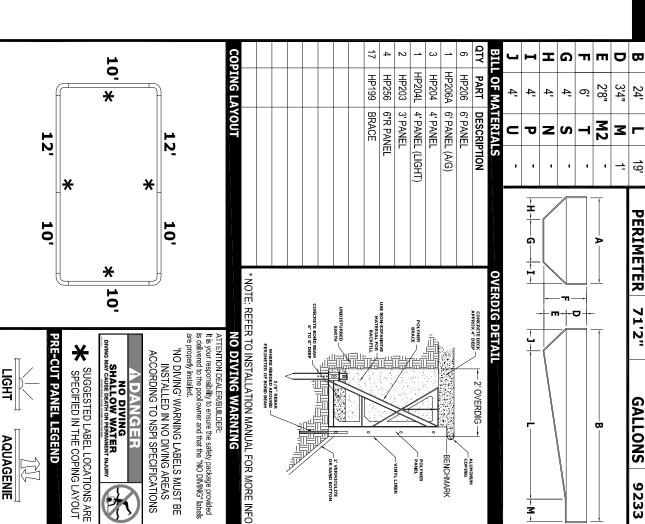

## GENERAL NOTES ese are finished dimensions ready for the liner. EXCAVATION NOTES Rough excavation should be 2" deeper in each instance.

- Dimensions are from inside pool panels.

uocument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12/6/2005 Rev Level: A

- 3. The ideal water level should be to the middle of the skimmer opening(s).
- 2. Soil to have minimum bearing capacity of 2000 P.S.F.
  3. Locate top of pool at least 6" above surrounding land elevation.
  4. See 'Over Dig Detail' for excavation around pool.
  5. Fill voids under base of panels and tamp well.
  6. Backfill with non-expansive material.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. ADDITIONAL NOTES

The dealer or contractor who sells or installs your pool is an independant contractor and is not an construction. Proper installation is the responsibility of the dealer/builder/contractor. only to normal ground conditions. There may be additional precautions and/or methods of agent of the Manufacturer. The construction methods illustrated here are suggestions and apply

20101-PWH

Copyright © 2012 by Hydra Pools