

16' X 32' RECTANGLE 6" RADIUS

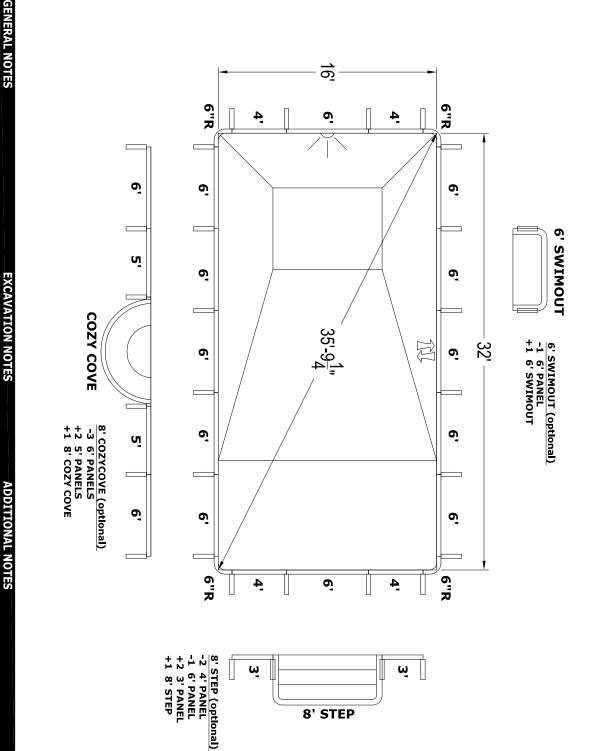

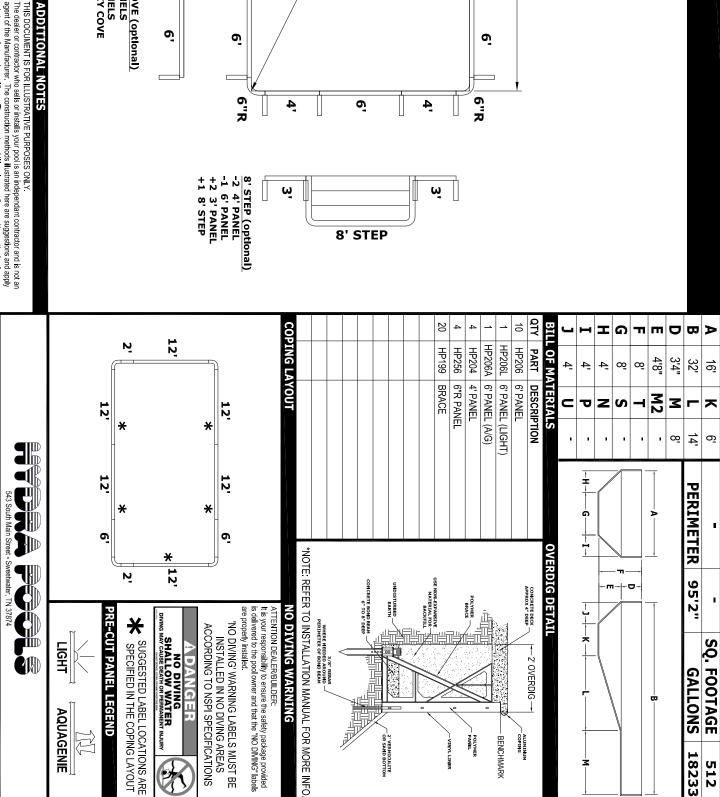

8' STEP

uvcument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 1262005 Rev Level⁻ A

3. The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill words under base of panets and tamp well.
6. Backfill with non-expansive material.

construction. Proper installation is the responsibility of the dealer/builder/contractor. only to normal ground conditions. There may be additional precautions and/or methods of

JAN 2012 CORNERSTONE

16' X 32' RECTANGLE 6" RADIUS

Copyright © 2012 by Hydra Pools

20120-PWH

Rough excavation should be 2" deeper in each instance.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

Dimensions are from inside pool panels. ese are finished dimensions ready for the liner.