


8' X 36' RECTANGLE 6" RADIUS - WEDGE

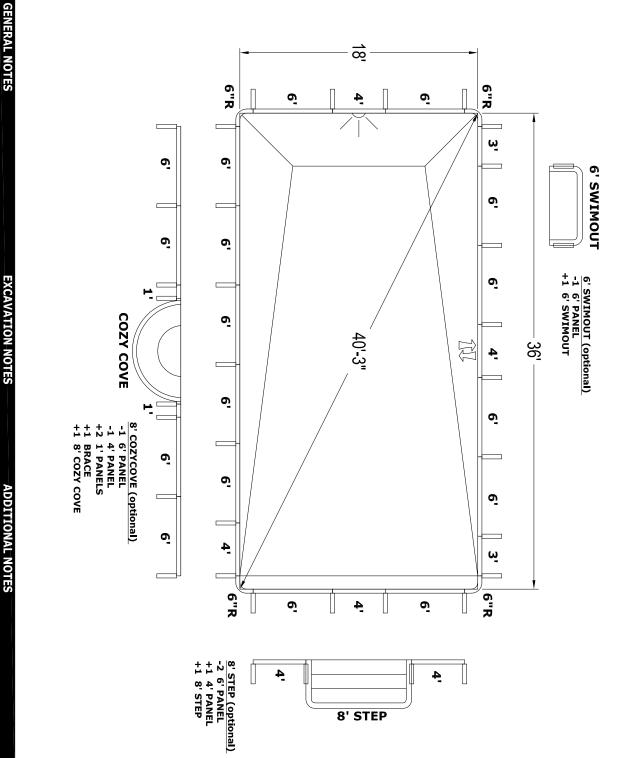


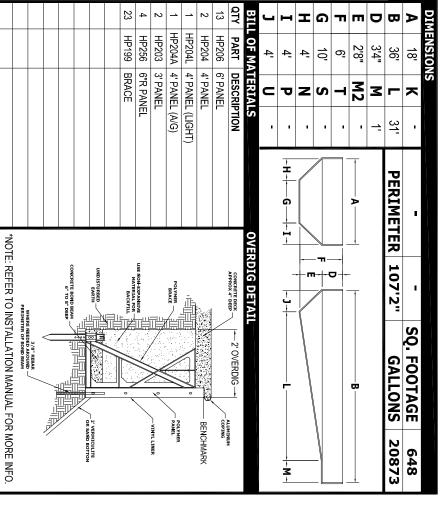



COPING LAYOU

ATTENTION DEALER/BUILDER: NO DIVING WARNING





HSH

AQUAGENIE



JAN 2012 CORNERSTONE 18' X 36' RECTANGLE 6" RADIUS - WEDGE

20141-PWH

uvument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12:0:2005 Rev Level: A

Dimensions are from inside pool panels. ese are finished dimensions ready for the liner.

. The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill words under base of panets and tamp well.
6. Backfill with non-expansive material.

Rough excavation should be 2" deeper in each instance. THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. ADDITIONAL NOTES

The dealer or contractor who sells or installs your pool is an independant contractor and is not an only to normal ground conditions. There may be additional precautions and/or methods of agent of the Manufacturer. The construction methods Illustrated here are suggestions and apply Proper installation is the responsibility of the dealer/builder/contractor.

Copyright © 2012 by Hydra Pools