

## 16'6" X 32'6" GRECIAN - BOWTIE 32'6" 16'6" 3'4" 木 4'3" 4 <u>a</u> PERIMETER 88'1"

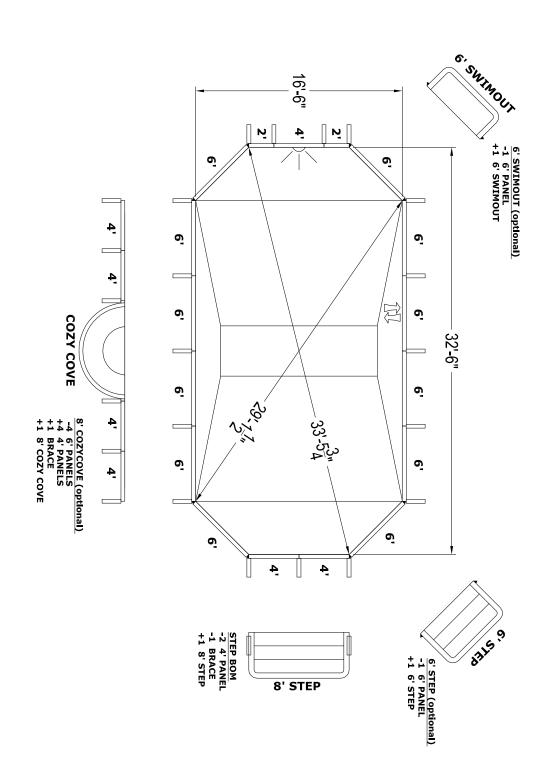


## QTY PART 11 | HP206 | 6' PANEL **a** BILL OF MATERIALS | HP213 | 45° WEDGE HP204L | 4' PANEL (LIGHT HP204 4' PANEL HP202 2' PANEL 12'6" 2'8" ð DESCRIPTION S U 43 <u>မ</u>-I-OVERDIG DETAIL \*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO. CONCRETE BOND BEAM 6" TO 8" DEEP UNDISTURBED APPROX 4" DEEP BRACE -M2-SQ. FOOTAGE |— 2' OVERDIG → **GALLONS** POLYMER COPING 2' VERMICULITE OR SAND BOTTOM BENCHMARK VINYL LINER 16286 536

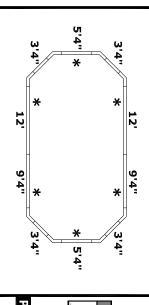

COPING LAYOUT

ATTENTION DEALER/BUILDER: NO DIVING WARNING

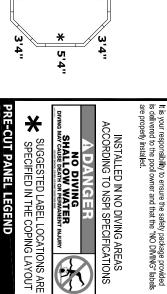



HSH

AQUAGENIE



JAN 2012 CORNERSTONE 16'6" X 32'6" GRECIAN - BOWTIE

20213-PWH

uocument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12/6/2005 Rev Level: A

3. The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill words under base of panets and tamp well.
6. Backfill with non-expansive material.

The dealer or contractor who sells or installs your pool is an independant contractor and is not an agent of the Manufacturer. The construction methods Illustrated here are suggestions and apply

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

construction. Proper installation is the responsibility of the dealer/builder/contractor. only to normal ground conditions. There may be additional precautions and/or methods of **EXCAVATION NOTES** 

Rough excavation should be 2" deeper in each instance.

Dimensions are from inside pool panels. ese are finished dimensions ready for the liner. GENERAL NOTES

Copyright © 2012 by Hydra Pools