

18'6" X 36'6" GRECIAN CONTOUR BOTTOM

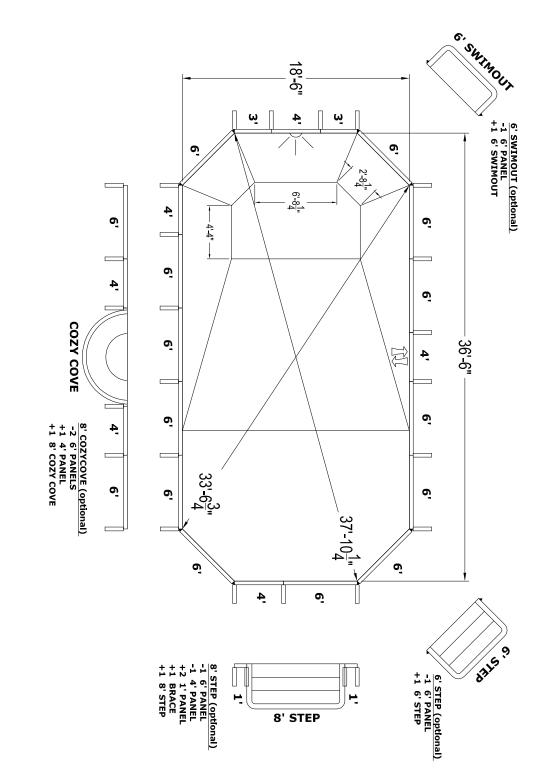


K 6'3" - PERIMETER M 12'3" - A - A - A - A - A - A - A - A - A -	K 6'3"	K 6'3" - PERIMETER M 12'3" - A - A - A - A - A - A - A - A - A -
PERIMETER	PERIMETER 100'1"	PERIMETER 100'1"
	ERIMETER 100'1" A	ERIMETER 100'1"
R 100'1'	100'1"	100'1"

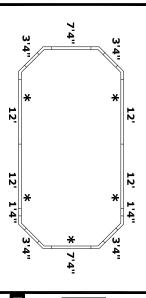

COPING LAYOUT

ATTENTION DEALER/BUILDER: NO DIVING WARNING

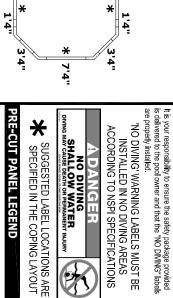



HSH

AQUAGENIE

13



JAN 2012 CORNERSTONE

uocument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12/6/2005 Rev Level: A

The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill wolds under base of panels and tamp well.
6. Backfill with non-expansive material.

The dealer or contractor who sells or installs your pool is an independant contractor and is not an agent of the Manufacturer. The construction methods Illustrated here are suggestions and apply

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

construction. Proper installation is the responsibility of the dealer/builder/contractor. only to normal ground conditions. There may be additional precautions and/or methods of **EXCAVATION NOTES**

Rough excavation should be 2" deeper in each instance.

Dimensions are from inside pool panels.

hese are finished dimensions ready for the liner.

GENERAL NOTES

18'6" X 36'6" GRECIAN CONTOUR BOTTOM

20231-PWH

Copyright © 2012 by Hydra Pools