

# 20'6" X 40'

Q.F. SIA  
CATERERS

F	6'	T	-
G	16'6"	S	-
H	2'	N	-
I	2'	P	-
J	13'	U	-



**OVERDIG DIF**

2' OVERDIG

Alum  
SPAN

**BILL OF MATERIALS**

QTY	PART	DESCRIPTION

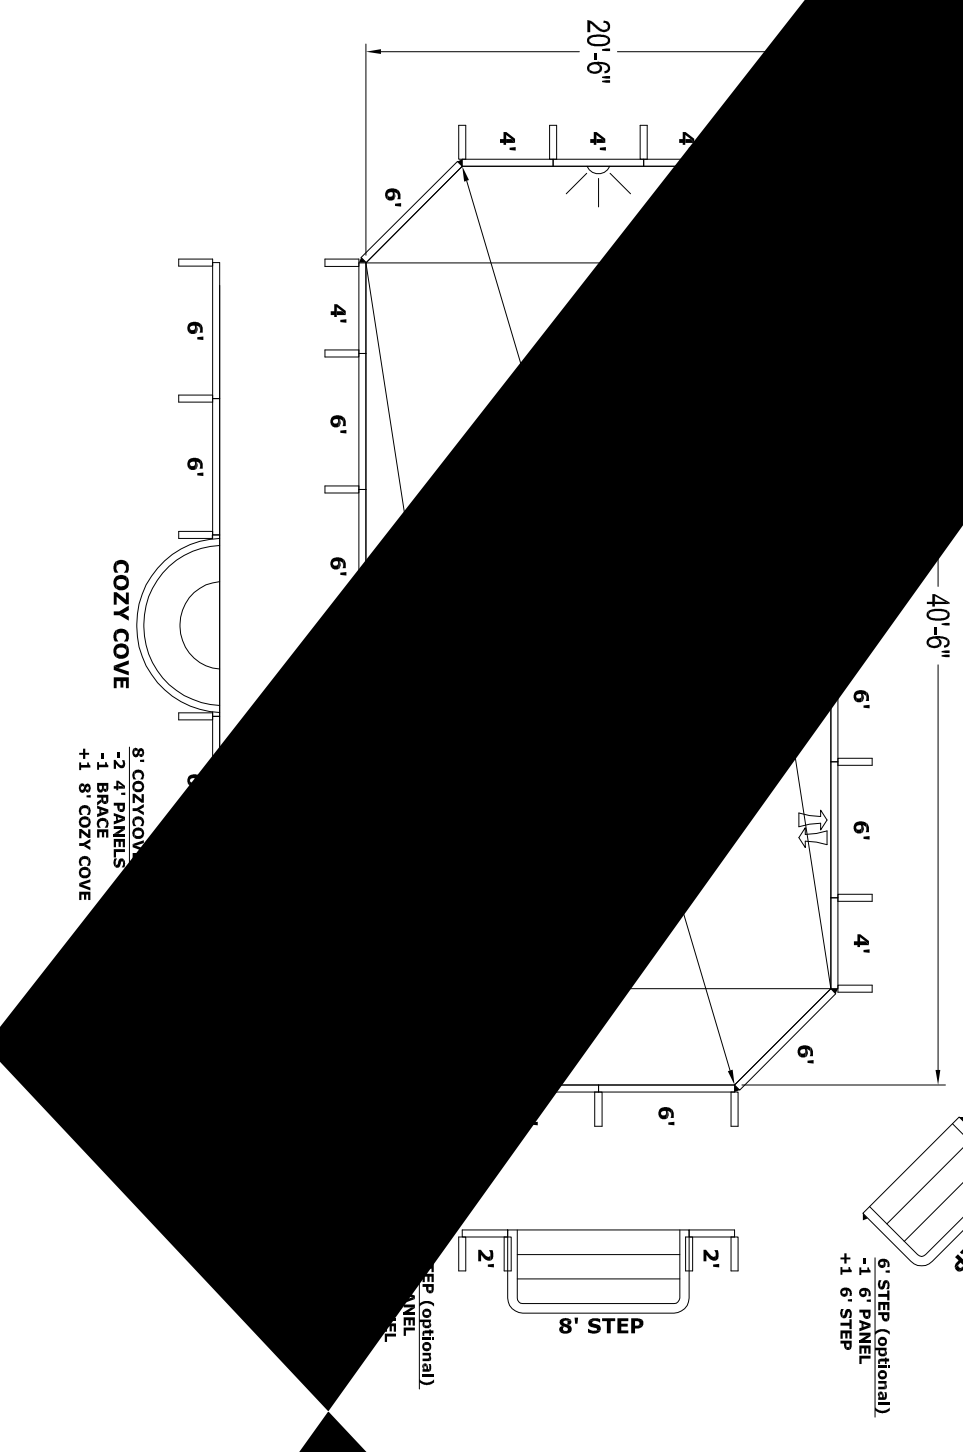

DATE	PANEL LINE	DRAWING TITLE
	CORNERSTONE	20'6" X 40'6" GRECIAN -

2. Dimensions are from inside pool panels.  
3. The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.  
3. Locate top of pool at least 6" above surrounding land elevation.  
4. See Overdig Detail for excavation around pool.  
5. Fill voids under base of panels and lamp well.  
6. Backfill with non-expansive material.

The dealer or contractor who sells or installs your pool is an independent contractor and is not an agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of construction. Proper installation is the responsibility of the dealer/contractor.