
$\overline{\infty}$



QTY PART

G

ġ

ഗ

U Z


-G---I--


-J--K--

48


19764 648


20

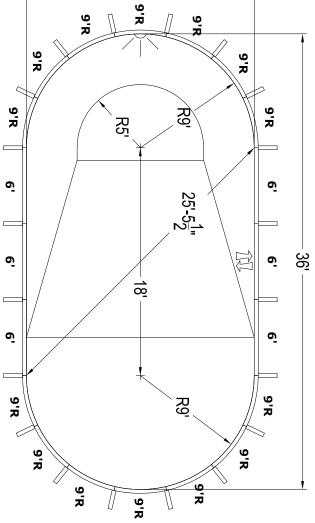



8' STEP (optional) +1 RADIUS 8' STEP +2 (9'R) 2' OVAL INSERT -3 9' RADIUS

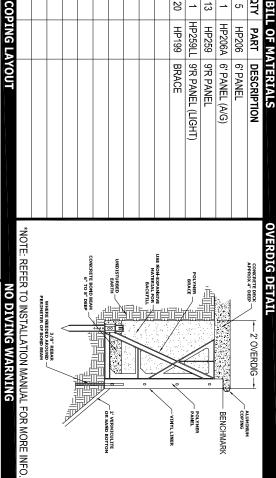



ហ្ម

ທັ

8' COZY COVE (optional)
-3 6' PANLS
+2 5' PANELS
+1 8' COZY COVE

COZY COVE



ATTENTION DEALER/BUILDER:





HGHT

AQUAGENIE 13



20320-PWH

uocument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12/6/2005 Rev Level: A

GENERAL NOTES

Dimensions are from inside pool panels. nese are finished dimensions ready for the liner.

3. The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill words under base of panets and tamp well.
6. Backfill with non-expansive material.

construction. Proper installation is the responsibility of the dealer/builder/contractor. only to normal ground conditions. There may be additional precautions and/or methods of agent of the Manufacturer. The construction methods Illustrated here are suggestions and apply The dealer or contractor who sells or installs your pool is an independant contractor and is not an **EXCAVATION NOTES**

Rough excavation should be 2" deeper in each instance.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

JAN 2012 CORNERSTONE

18' X 36' OVAL

Copyright © 2012 by Hydra Pools