

18' X 33'9" MARTINIQUE LEFT 33'83/," 14'8" 大 4



QTY PART DESCRIPTION 3 | HP206 | 6' PANEL **a** BILL OF MATERIALS |HP252M| 2'R PANEL HP206A | 6' PANEL (A/G) HP259A 9'R PANEL (A/G) HP217 | 2'9" SPECIAL PANEL HP204L | 4' PANEL (LIGHT) HP199 | BRACE HP224 | REVERSE 45° TEE PANEL HP225 | (9'R) 3' ROMAN INSERT HP216 | 1'8" SPECIAL PANEL HP202 | 2' PANEL HP203 3' PANEL HP259 HP218 | 5'8" SPECIAL PANEL 3'4" ර ශූ 슣 9'R PANEL U ഗ Z 12'61/4" 13'2½" 16'3/" ᅘ PERIMETER -G---I--OVERDIG DETAIL CONCRETE BOND BEAM 6" TO 8" DEEP 91'9" INDISTURBED EARTH APPROX 4" DEEP POLYMER BRACE -J--K--3/8" REBAR WHERE NEEDED AROUND PERIMETER OF BOND BEAM - 2' OVERDIG-SQ. FOOTAGE **GALLONS** 14,506 POLYMER BENCHMARK OR SAND BOTTOM VINYL LINER 549

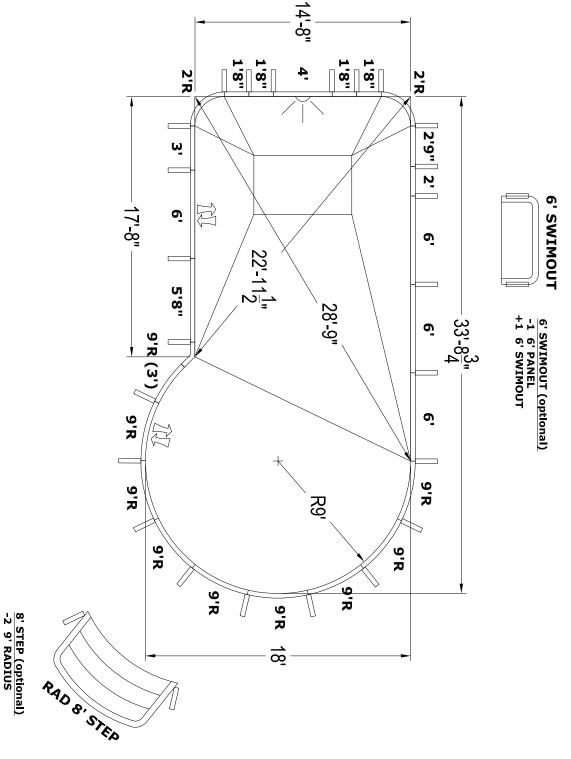

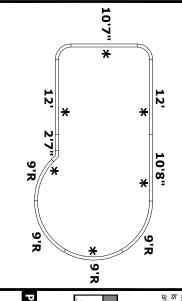

COPING LAYOUT

*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.

NO DIVING WARNING

ATTENTION DEALER/BUILDER:

'NO DIVING' WARNING LABELS MUST BE ACCORDING NSPI SPECIFICATIONS INSTALLED IN NO DIVING AREAS

NO DIVING
SHALLOW WATER
DIVING MAY CAUSE DEATH OR PERMANENT INJURY DANGER

SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT

PRE-CUT PANEL LEGEND









18' X 33'9" MARTINIQUE LEFT

20370-PWH

uocument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12/6/2005 Rev Level: A

3. The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill words under base of panets and tamp well.
6. Backfill with non-expansive material.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply The dealer or contractor who sells or installs your pool is an independant contractor and is not an

construction. Proper installation is the responsibility of the dealer/builder/contractor. only to normal ground conditions. There may be additional precautions and/or methods of THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

-1 BRACE

+1 RAD 8' STEP

EXCAVATION NOTES

Rough excavation should be 2" deeper in each instance.

Dimensions are from inside pool panels. ese are finished dimensions ready for the liner. GENERAL NOTES

Copyright © 2012 by Hydra Pools