
18' X 33'9" MARTINIQUE RIGHT

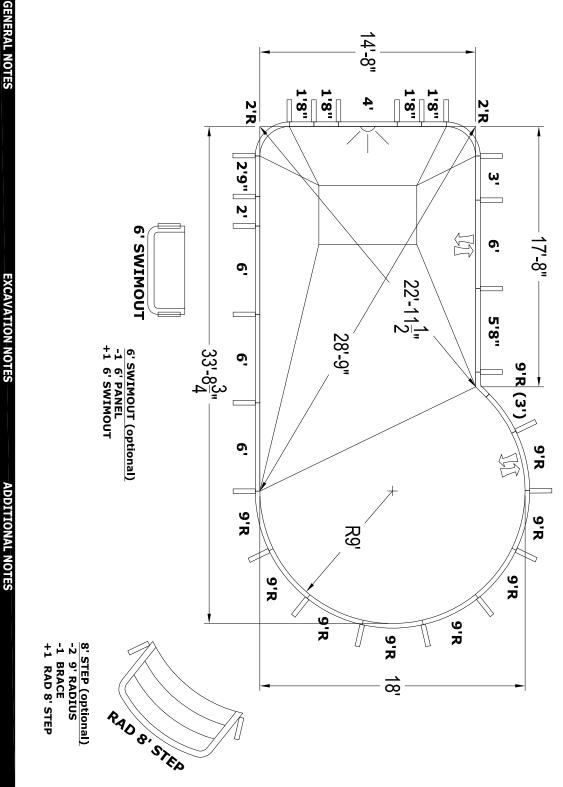

| | | % | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|---|---|---|--|-----------|-----------|-------------------------------------|-----------------|------------------|--------------------|-----------------------|--------------------|----------|------------------|--------------------|----------------|--------------|---------------|----------------|----|-------------|-------|-------------|----------------|-----------|--------|-----------|-------------|
| | 10'7" | | | COP | 24 | _ | 2 | _ | _ | 7 | 4 | _ | 1 | 1 | _ | _ | 1 | သ | QΤY | BIL | ſ | Ι | I | വ | F | ш | ٥ | В | A |
| | * | | | COPING LAYOUT | HP199 | HP224 | HP252M | HP225 | HP259A | HP259 | HP216 | HP202 | HP217 | HP203 | HP204L | HP218 | HP206A | | PART | L OF MATERIALS | 4' | 4' | 4' | 6'8" | ට | 1'8" | 3'4" | 33'8¾" | 14'8" |
| | | 12' | | TUO/ | BRACE | REVERSE | 2'R PANEL | (9'R) 3' R | 9'R PANEL (A/G) | 9'R PANEL | 1'8" SPE(| 2' PANEL | 2'9" SPE(| 3' PANEL | 4' PANEL (LIGHT) | 5'8" SPE | 6' PANEL (A/G) | 6' PANEL | DESCRIPTION | TERLAL | _ | P | Z | S | - | ™ | 3 | ٦ | _ |
| * | | * 2'7 | | | | 45° | <u> </u> | (9'R) 3' ROMAN INSERT | L (A/G) | H | 1'8" SPECIAL PANEL | | 2'9" SPECIAL PANEL | | (LIGHT) | 5'8" SPECIAL PANEL | (A/G) | | NOIT | S | • | 16'3/," | 17'8" | • | 1 8 | | 12'6¼" | 13'2½" | 4' |
| * | | *\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\ | ; | | | TEE PANEL | | SERT | | | ۳ | | H | | | ۳ | | | | | | + | | | | | | Эd | |
| | | | | | | | | | | | | | | | | | | | | | | - - - | | | | | | PERIMETER | |
| 9 R | * | 9'R | | *NOTE: | | | | | | | | | _ | | | | | | | OVER | | <u> </u> | | | _ - | | | TER | |
| | 9 R | 1 | AT It is are | *NOTE: REFER TO INSTALLATION MANUAL NO DIVING WARNING | | | | CONCRETE BOND BEAM 6" TO 8" DEEP | - | UNDISTURBED | | MATERIAL FOR BACKFILL | ISE NON-EXPANS | | POLYMER | ĪЬ | | APPROX 4" DE | CONCRETE DECK | OVERDIG DETAIL | | <u></u> | -п | 1- -1 | - | T | | 91'9" | |
| ★ su | HS AVA CA | 'NO DIV INS' ACCC | ATTENTION DEALER/BUILDER: It is your responsibility to ensure t is delivered to the pool owner and are properly installed. | TO INSTALLATION MANUAL | WHERE NEEDED AROUND PERIMETER OF BOND BEAM | < | _ | BEAM | | | 詍 | | | | | | | / | Ŧ | | | <u>-</u> - | | | | | | | S |
| GGESTEI ECIFIED | DAN NO DIV ALLOW USE DEATH O | ING' WAR FALLED II DRDING N | EALER/BUILI sibility to ens ne pool owne talled. | LATION N | OND BEAM | /S" REBAR | | | | | | \ | | × | / | 1 | | | 2' OVERDIG | | | | | | | | | GA | ე. F0 |
| SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT | NO DIVING SHALLOW WATER DIVING MAY CAUSE DEATH OR PERMANENT INJURY | 'NO DIVING' WARNING LABELS MUST BE INSTALLED IN NO DIVING AREAS ACCORDING NSPI SPECIFICATIONS | ATTENTION DEALER/BUILDER: It is your responsibility to ensure the safety package provided its delivered to the pool owner and that the "NO DIVING" labels are properly installed. | MANUAL F | | | | | | | | • | | 0 | <u> </u> | • | | _ | <u>;</u> | | | | \ | \setminus | | 6 | | GALLONS | SQ. FOOTAGE |
| OCATIONO PING LA | YRULNI | BELS MUS NG AREA XIFICATIO | ty package p | FOR MORE | | , | | | OR SAND BOTTOM | 2' VERMICIII III | | | - ATMAC CIMES | | POLYMER | | BENCHMARK | COPING | | | | 3 | | | | | | | |
| NS ARE YYOUT | (1) | ST BE | rovided G" labels | E INFO. | | | | | OM. | " | | | | | | | 쏫 | | | | | <u></u> | | | | | | 14,506 | 549 |

ADDITIONAL NOTES

Rough excavation should be 2" deeper in each instance.

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill volds under base of panets and tamp well.
6. Backfill with non-expansive material. THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

The dealer or contractor who sells or installs your pool is an independant contractor and is not an agent of the Manufacturer. The construction methods flustrated here are suggestions and apply construction. Proper installation is the responsibility of the dealer/builder/contractor. only to normal ground conditions. There may be additional precautions and/or methods of

Document ID: HTF5100, Hydra Standard Panel Layout Drawing Rev Date: 12/6/2005
Rev Level: A

3. The ideal water level should be to the middle of the skimmer opening(s).

Dimensions are from inside pool panels. hese are finished dimensions ready for the liner.



12

10'8"

9'R

PRE-CUT PANEL LEGEND

HGHT

AQUAGENIE 13



JAN 2012 | CORNERSTONE 18' X 33'9" MARTINIQUE RIGHT

20371-PWH

Copyright © 2012 by Hydra Pools