18' X 36'4" MARTINIQUE LEFT

Þ

木

<u>ත</u>

36'41/4" 15'2"

14'21/4" 12'2"

PERIMETER

92'5"

GALLONS


18,096 596

SQ. FOOTAGE

3'4"

3

DIMENSIONS

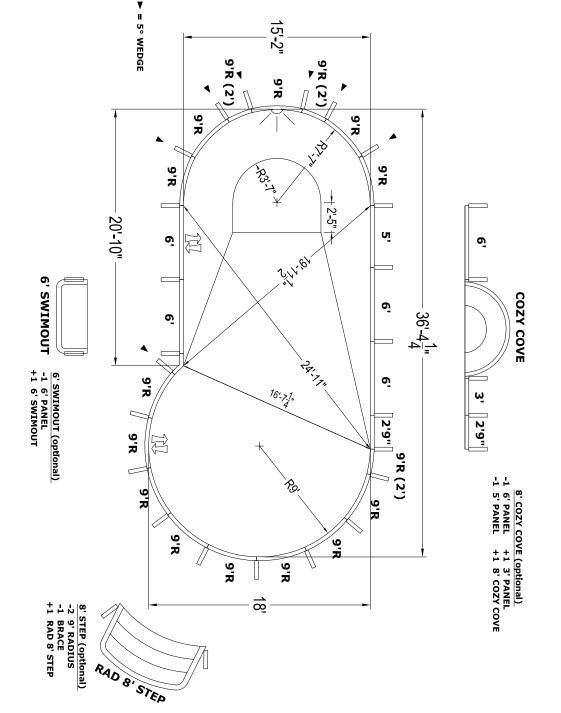

ADDITIONAL NOTES

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill volds under base of panets and tamp well.
6. Backfill with non-expansive material. Rough excavation should be 2" deeper in each instance.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

The dealer or contractor who sells or installs your pool is an independant contractor and is not an agent of the Manufacturer. The construction methods flustrated here are suggestions and apply construction. Proper installation is the responsibility of the dealer/builder/contractor. only to normal ground conditions. There may be additional precautions and/or methods of

JAN 2012 CORNERSTONE

18' X 36'4" MARTINIQUE LEFT

Copyright © 2012 by Hydra Pools

20375-PWH

7'7"R	3			23	7	_	ယ	_ -	_ =	<u> </u>	_	_	ω	ΩŢΥ	E	J	н	I	G	П	ш
7'7"R 7'7"R 7'7"R	7			HP199	HP226	HP224	HP210	HP259A	HP25911	HP217	HP205	HP206A	HP206	PART		4'	4'	4'	7'2"	œ	4'8"
	4110A			BRACE	5° WEDGE	REVERSE 45°	(9'R) 2' C	9'R PANEL (A/G)	9'R PANEL	2'9" SPE	5' PANEL	6' PANEL (A/G)	6' PANEL	DESCRIPTION	OF MATERIALS	U	P	N	S	7	M2
11'10" * * * 12'					託		(9'R) 2' OVAL INSERT	IT (A/G)	9'R PANEL (LIGHT)	2'9" SPECIAL PANEL		- (A/G)	'	PTION	S		15'61/4"	20'10"		18'	
9 × × ×						TEE PANEL	낌										+	_/			T
* * *																	 				
אָפּע *	*NOT														OVE		1			_	<u> </u>
ง ห	E REFE			CONCRETE BOND BEAM 6" TO 8" DEEP		UNDISTURBED EARTH		USE NON-EX MATER E		POLYMER BRACE				CONCRETE DECK	OVERDIG DETAIL		_	пт	- TT - 1 - - C	- - -	_
ATTENTION DEALERBUILDER: It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels are properly installed. "NO DIVING" WARNING LABELS MUST BE INSTALLED IN NO DIVING AREAS ACCORDING NSPI SPECIFICATIONS A DANGER SHALLOW WATER DIVING MAY CAUSE DEATH OF REMANASET INJURY SPECIFIED IN THE COPING LAYOUT PRE-CUT PANIEL LEGEND PRE-CUT PANIEL LEGEND AQUAGENIE	*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.	PERIMETER			<u>ال</u>			MATERIAL FOR BACKFILL					_	E DECK	ETAIL		-JK-				
THENTING WARNING THENTING THE WIND BLAEFRIBULDER: Is your responsibility to ensure the safety package provided delivered to the pool owner and that the "NO DIVING" labels to properly installed. 'NO DIVING' WARNING LABELS MUST BE INSTALLED IN NO DIVING AREAS ACCORDING NSPI SPECIFICATIONS A DANGER NATION SPECIFICATIONS AND BLYING WATER NATION WATER SHALLOW WATER SPECIFIED IN THE COPING LAYOUT RE-CUTIPANIEL LEGEND RE-CUTIPANIEL LEGEND RE-CUTIPANIEL LEGEND RE-CUTIPANIEL LEGEND AQUAGENIE	ALLATION	WHERE NEEDED AROUND PERIMETER OF BOND BEAM	3/8" REBAR	1					\langle	4	1			-2' OVERDIG			+	-\			
INCLING LIDER: Insure the safety wer and that the " IN NO DIVINI IN NO DIVINI IN SPECIF WATER WATER OID PERMANERT IN DIVINITY DIVING DIVINITY DIVING DIVINITY DIVINIT	MANUAL							~	<u></u>		Ů		_)IG→			T	\			B
TER AMBERT NAJURY GEND AQUAGENIE & STEELS MUST O DIVING AREAS SPECIFICATIONS BELL LOCATIONS BELL LOCATION	FOR MO				OR SAND BO	2' VERMICULITE			VINYL LINER	PANEL		BENCHMARK	COPING				<u> </u>				
provided NC' labels JST BE AS ONS ONS ARE AYOUT	RE INFO.				эттом	лте			Ŗ			IARK					_				

3. The ideal water level should be to the middle of the skimmer opening(s).

Dimensions are from inside pool panels. hese are finished dimensions ready for the liner. **GENERAL NOTES**

EXCAVATION NOTES