18' X 39'8" LAZY "L" LEFT 2' RADIUS

28'6"

4 ರಾ

PERIMETER 107'7"

SQ. FOOTAGE

GALLONS


22220 672

ᅘ

48 3'4"

3

15'81/2"

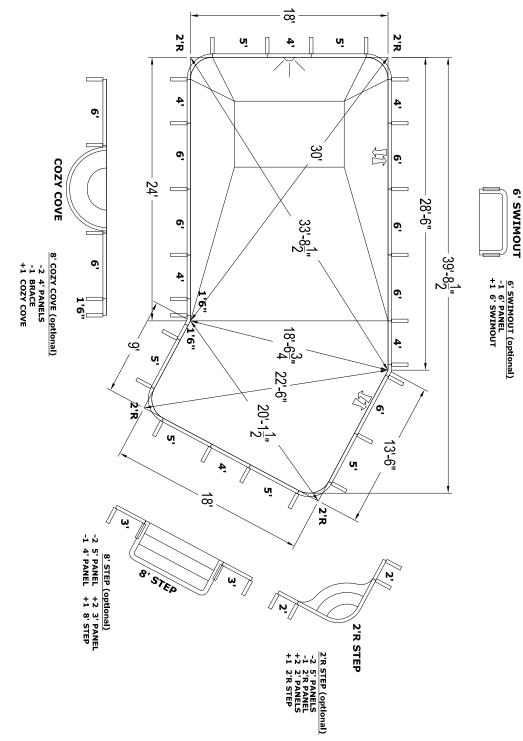

QTY PART COPING LAYOUT **a** 4 | HP206 | 6' PANEL BILL OF MATERIALS 12 Ŋ |HP252M | 2'R PANEL HP282S | 1'6" SPECIAL PANEL HP204L | 4' PANEL (LIGHT) HP204 | 4' PANEL HP220 HP221 | 30° LAZY-ELL PANEL HP205 | 5' PANEL ą DESCRIPTION **REV 30° LAZY-ELL PANEL** 12 12 S U 13'6" 2 ᅘ ശ് 9'6" 12 -G--I-*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO. OVERDIG DETAIL 12 CONCRETE BOND BEAM 6" TO 8" DEEP E NON-EXPANSIVE MATERIAL FOR — BACKFILL APPROX 4" DEEP BRACE -J--K--It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels are properly installed. ATTENTION DEALER/BUILDER: NO DIVING WARNING PRE-CUT PANEL LEGEND NO DIVING SHALLOW WATER DIVING MAY CAUSE DEATH OR PERMANENT INJURY 3/8" REBAR WHERE NEEDED AROUND PERIMETER OF BOND BEAM SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT 'NO DIVING' WARNING LABELS MUST BE ACCORDING TO NSPI SPECIFICATIONS INSTALLED IN NO DIVING AREAS --- 2' OVERDIG ---

2' VERMICULITE OR SAND BOTTOM

BENCHMARK

VINYL LINER

uvument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12:052005 Rev Level⁻ A

Dimensions are from inside pool panels. ese are finished dimensions ready for the liner. GENERAL NOTES

- The ideal water level should be to the middle of the skimmer opening(s).

Rough excavation should be 2" deeper in each instance.

EXCAVATION NOTES

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See "Overdig Detail" for excavation around pool.
5. Fill wolds under base of panels and tamp well.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. ADDITIONAL NOTES

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply The dealer or contractor who sells or installs your pool is an independant contractor and is not an construction. Proper installation is the responsibility of the dealer/builder/contractor. only to normal ground conditions. There may be additional precautions and/or methods of





HGHT

AQUAGENIE





JAN 2012 CORNERSTONE

20425-PWH