

18' X 39' LAZY "L" LEFT 4' RADIUS DIMENSIONS

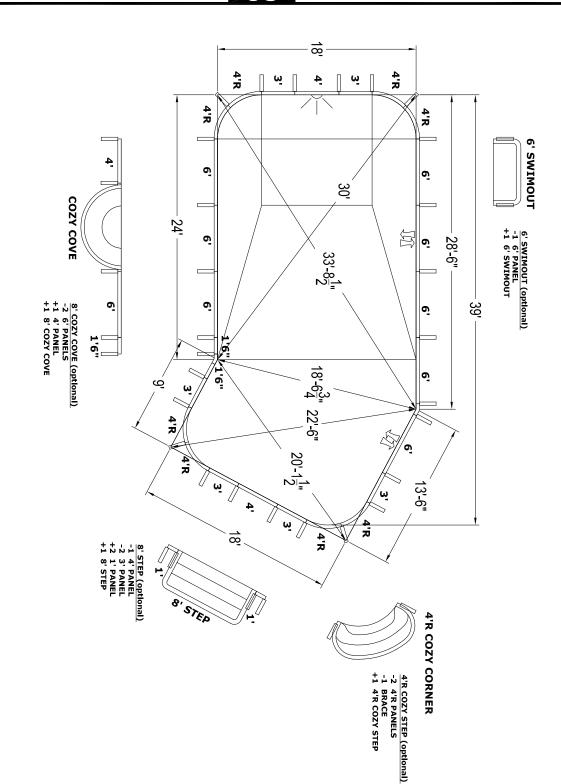

		27	_	_	∞	2	6	_	_	2	6	QΤY	BIL	J	н	I	G	71	ш	o	ᄧ	Þ
		HP199	HP220	HP221	HP254	HP282S	HP203	HP204L	HP204	HP206A	HP206	PART	BILL OF MATERIALS	4'	4'	4'	10'	81	4'8"	3'4"	28'6"	18'
		BRACE	REV 30°	30° LAZY	4'R PANEL	1'6" SPE	3' PANEL	4' PANEL (LIGHT)	4' PANEL	6' PANEL (A/G)	6' PANEL	DESCRIPTION	TERIAL	U	P	N	S	7	M2	=	_	K
			REV 30° LAZY-ELL PANE	30° LAZY-ELL PANEL		1'6" SPECIAL PANEL	•	(LIGHT)	ľ	. (A/G)	•	NOITe	S	Ī	ဖ	24'	13'6"	18'	1	5	14'	<u> </u>
			. PANEL	臣		尸									+						PI	
															_ 				 		PERIMETER	
													OVER		1						:TER	
WHERE NE	,	CONCRETE BOND BEAM	UNDISTURBED EARTH		MATERIAL FOR - BACKFILL	USE NON-EXPANSIVE		POLYMER BRACE	ıĪξ			CONCRETE DECK APPROX 4" DEEP	OVERDIG DETAIL		<u> </u>	-п	- II- I- - (- - -	Ŧ		104'2"	I
		量	BACKFILL							× × × × × × × × × × × × × × × × × × ×	TAIL		-JK-						2"	(6		
3/8" REBAR WHERE NEEDED AROUND – PERIMETER OF BOND BEAM	<u> </u>								- 2' OVERDIG		+	-\					9	įQ. FC				
			~						_)G 			T				-B		GALLONS 22,000	SQ. FOOTAGE		
			2' VERMICULITE			\	VINYL LINER	POLYMER		— BENCHMARK	COPING	ALUNINUM			+		_				S	H
			CULITE					_							<u> </u>						2,00	661
															1		_L				10	•

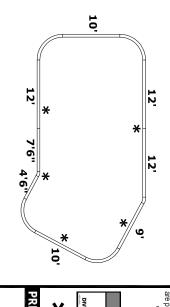

It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels are properly installed. ATTENTION DEALER/BUILDER: *NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.

NO DIVING WARNING

COPING LAYOUT

'NO DIVING' WARNING LABELS MUST BE ACCORDING TO NSPI SPECIFICATIONS INSTALLED IN NO DIVING AREAS

NO DIVING
SHALLOW WATER
DIVING MAY CAUSE DEATH OR PERMANENT INJURY **DANGER**

SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT

PRE-CUT PANEL LEGEND





JAN 2012 CORNERSTONE 18' X 39' LAZY-ELL LEFT 4' RADIUS

20430-PWH

uocument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12/6/2005 Rev Level: A

3. The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.

3. Locate top of pool at least 6" above surrouncing land elevation.

4. See 'Overdig Detail' for excavation around pool.

5. Fill voids under base of panets and tamp well.

6. Backfill with non-expansive material.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply

construction. Proper installation is the responsibility of the dealer/builder/contractor. only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

EXCAVATION NOTES

Rough excavation should be 2" deeper in each instance.

Dimensions are from inside pool panels. ese are finished dimensions ready for the liner. GENERAL NOTES

Copyright © 2012 by Hydra Pools