

## 6' X 41' X 24' TRUE "L" RIGHT 6" RADIUS (90°) W D 41 <u>6</u> 木 4 <u>ත</u> PERIMETER 128'8"

SQ. FOOTAGE

784



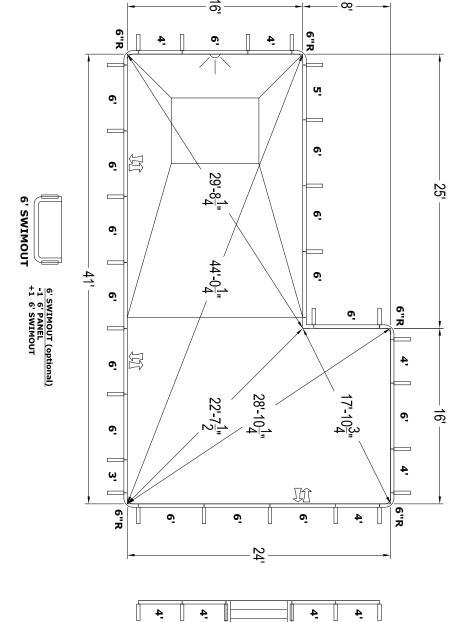

6' STEP

COPING LAYOU

\*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.

3/8" REBAR
WHERE NEEDED AROUND —
PERIMETER OF BOND BEAM


NO DIVING WARNING ATTENTION DEALER/BUILDER:


INSTALLED IN NO DIVING AREAS

DANGER

6' STEP (optional)
-2 6' PANELS
-1 6' A/G PANEL
+3 4' PANELS
+1 BRACE
+1 6' STEP

			27	1	5	_	5	_	ယ	_	1	QTY	띹	J	Ι	I	<b>a</b>	П	ш	O	ᇚ	
			HP199	HP222	HP256	HP203	HP204	HP205	HP206A	HP206L	HP206		<b>BILL OF MATERIALS</b>	4'	4'	4'	œ	œ	4'8"	3'4"	41'	
			BRACE	<b>REVERS</b>	6"R PANEL	3' PANEL	4' PANEL	5' PANEL	6' PANEL (A/G)	HP206L $\mid$ 6' PANEL (LIGHT)	6' PANEL	PART DESCRIPTION	TERIAL	U	P	Z	S	-	<b>M2</b>	3	_	
				REVERSE 90° PANEL	iii ii	·			. (A/G)	. (LIGHT)		NOIT	S		œ	25'	24'	16'	•	17'	14'	
				EL											H-H-G				A		PERIMETER	
	8		c			use							OVERD1		1		- <del>ग</del> -					
	CONCRETE BOND BEAM 6" TO 8" DEEP	1	UNDISTURBED	<u>,</u>	BACKFILL	USE NON-EXPANSIVE	<del></del>	POLYMER BRACE		ૈન		CONCRETE DECK	OVERDIG DETAIL		<b>J</b>	-п		<b>5</b> -	Ţ		128'8"	
\ \			,					POLYMER		N BE	СОРІ	2' OVERDIG			-K	-			B		GALLONS 24,354	
•		AND BOTTOM	2' VERMICULITE				VINYL LINER	YMER		BENCHMARK	COPING				<u> </u>						24,354	

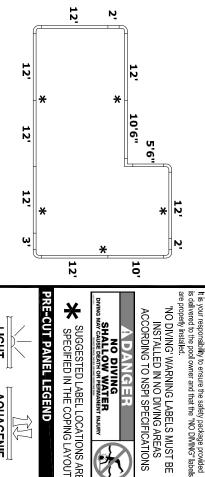

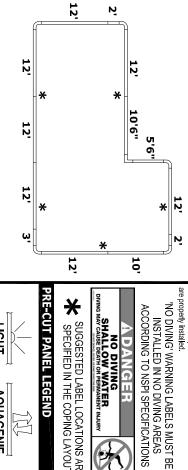

SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT



HGHT

**AQUAGENIE** 13



JAN 2012 CORNERSTONE 16' X 41' X 24' TRUE "L" RIGHT 6" RADIUS

uvurment ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12062005 Rev Level<sup>-</sup> A

GENERAL NOTES

. The ideal water level should be to the middle of the skimmer opening(s).

2. Soit to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill yords under base of panels and tamp well.
6. Backfill with non-expansive material.

**EXCAVATION NOTES** 

Rough excavation should be 2" deeper in each instance.

The dealer or contractor who sells or installs your pool is an independant contractor and is not an only to normal ground conditions. There may be additional precautions and/or methods of agent of the Manufacturer. The construction methods illustrated here are suggestions and apply

Proper installation is the responsibility of the dealer/builder/contractor.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

Dimensions are from inside pool panels.

ese are finished dimensions ready for the liner.

20501-PWH

Copyright © 2012 by Hydra Pools