## 6' X 41' X 24' TRUE "L" RIGHT 2' RADIUS (2'RR)

D

<u>6</u>


木


<u>ත</u>

SQ. FOOTAGE

784

DIMENSIONS

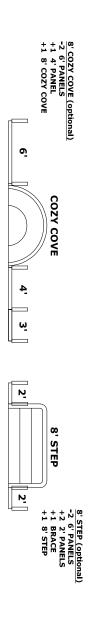


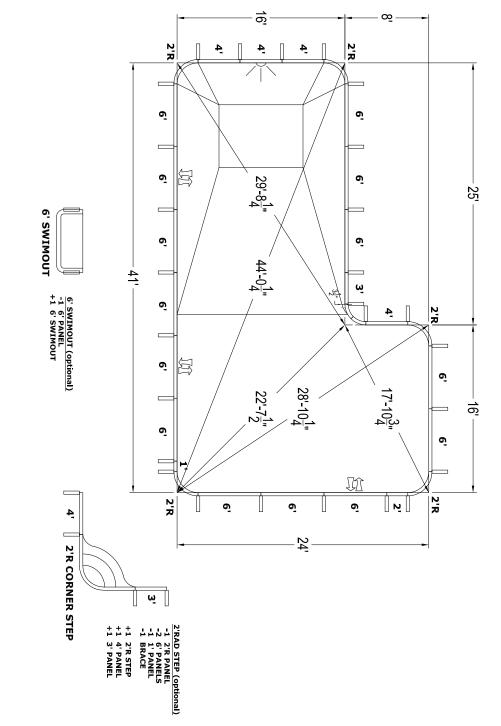


	-			_		
8	41'	_	14	PERIMETER 125'2"	<b>GALLONS</b> 24,240	24,240
D	3'4"	<b>=</b>	17'			
ш	4'8"	<b>™</b>		A	B	
F	œ	_	<u>1</u> 6	<b>7</b>		
Ð	œ.	S	24'	- TI TI TI TI		
Н	4'	Z	25'		_	
Ι	4'	P	œ	-H	-	<u> </u>
Ţ	4'	C	•			
BILL	L OF MA	OF MATERIALS	S	OVERDIG DETAIL		
QTY	PART	DESCRIPTION	NOITe			
11	HP206	6' PANEL		APPROX 4" DEEP 2	2' OVERDIG —	ALUMINUM
ယ	HP206A	6' PANEL (A/G)	- (A/G)		BEN	BENCHMARK
ယ	HP204	4' PANEL	'			
_	HP204L	4' PANEL (LIGHT)	- (LIGHT)		ı	POLYMER
_	HP203	3' PANEL		BRACE		ANEL
	HP202	2' PANEL	'		/ <u>≥</u>	VINYL LINER
_	HP201	1' PANEL		USE NON-EXPANSIVE HAND MATERIAL FOR	\\ \ \	
5	HP252M	2'R PANEL		BACKTILL		
2	HP252RR 2' RADIUS REVERSE	2' RADIU	S REVER			
27	HP199	BRACE		EARTH HILL		2' VERMICULITE OR SAND BOTTOM
				CONCRETE BOND BEAM		
				6: 10 8: DEEP		
					, TIP.	7
				3/8" REBAR WHERE NEEDED AROUND PERINETER OF BOND BEAM	S" REBAR AROUND  ND BEAM	
				*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.	TION MANUAL FOR	₹ MORE INFO.

COPING LAYOUT

NO DIVING WARNING ATTENTION DEALER/BUILDER:

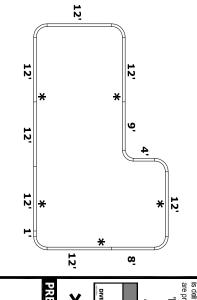

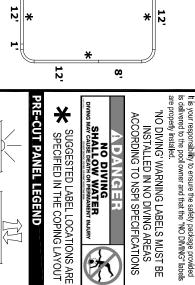



HSH

**AQUAGENIE** 



16' X 41' X 24' TRUE L RIGHT 2' RADIUS

20518-PWH

Copyright © 2012 by Hydra Pools

uocument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12/6/2005 Rev Level: A

GENERAL NOTES

. The ideal water level should be to the middle of the skimmer opening(s).

2. Soit to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill yords under base of panels and tamp well.
6. Backfill with non-expansive material.

**EXCAVATION NOTES** 

Rough excavation should be 2" deeper in each instance.

The dealer or contractor who sells or installs your pool is an independant contractor and is not an only to normal ground conditions. There may be additional precautions and/or methods of agent of the Manufacturer. The construction methods illustrated here are suggestions and apply

Proper installation is the responsibility of the dealer/builder/contractor.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

Dimensions are from inside pool panels

ese are finished dimensions ready for the liner.

JAN 2012 CORNERSTONE