형

4

ا تر

HP202 | 2' PANEL

HP204L | 4' PANEL (LIGHT

HP254 | 4'R PANEL

E NON-EXPANSIVE
MATERIAL FOR —
BACKFILL

BRACE

POLYMER

VINYL LINER

COPING BENCHMARK

HP222

REVERSE 90° PANEL

CONCRETE BOND BEAM 6" TO 8" DEEP

2' VERMICULITE OR SAND BOTTOM

HP204

4' PANEL


HP205 | 5' PANEL


HP206 | 6' PANEL

4'R

혓

## 16' X 41' X 32' TRUE "L" LEFT 4' RADIUS (90°) 4'R 4'R σį ō 6' SWIMOUT ō 4 6' SWIMOUT (optional) -1 6' PANEL +1 6' SWIMOUT ō 日 <u>ه</u> 4 4'R 4'R COZY CORNER 4'R COZY STEP (optional) -2 4'R PANELS -1 BRACE +1 4'R COZY STEP QTY PART **G** W Þ BILL OF MATERIALS 4'8" 3'4" 41 <u>6</u> ω DESCRIPTION <u>₹</u> S 木 Z 3 U 32 1 4 ರಾ 25 ಕ್ಕ 형 PERIMETER 137'5" -G--I-OVERDIG DETAIL -|-- □ APPROX 4" DEEP -J--K--SQ. FOOTAGE --- 2' OVERDIG --GALLONS 26,731 912

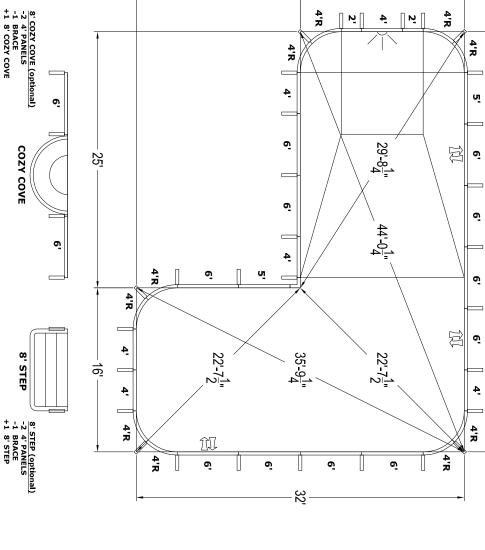

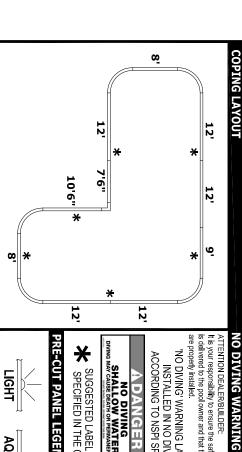

œ	*	10'6"	<del>(</del>	***				*	12. 9.
	H	-			12'				
LIGHT		PRE-CUT PANEL LEGEND	* SUGGESTED	NO DIVING SHALLOW WATER DIVING MAY CAUSE DEATH OR PERMANENT INJURY	ADANO	ACCORDING TO	'NO DIVING' WARI	are properly installed.	is delivered to the pool owner
AQUAGENIE		LEGEND	SUGGESTED LABEL LOCATIONS ARI	WATER PERMANENT INJURY	ANGER	ACCORDING TO NSPI SPECIFICATIONS	'NO DIVING' WARNING LABELS MUST BE	מוש מושר מוס ואס בואוואס ושטכה	is delivered to the pool owner and that the "NO DIVING" labels

\*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.

3/8" REBAR WHERE NEEDED AROUND PERIMETER OF BOND BEAM



JAN 2012 CORNERSTONE 16' X 41' X 32' TRUE L LEFT 4' RADIUS

uocument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 1216/2005 Rev Level: A

The ideal water level should be to the middle of the skimmer opening(s).

2. Soit to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill yords under base of panels and tamp well.
6. Backfill with non-expansive material.

construction. Proper installation is the responsibility of the dealer/builder/contractor. only to normal ground conditions. There may be additional precautions and/or methods of agent of the Manufacturer. The construction methods illustrated here are suggestions and apply The dealer or contractor who sells or installs your pool is an independant contractor and is not an **EXCAVATION NOTES** 

Rough excavation should be 2" deeper in each instance.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

Dimensions are from inside pool panels ese are finished dimensions ready for the liner. GENERAL NOTES

20550-PWH

Copyright © 2012 by Hydra Pools