

15'2" x 34' KIDNEY LEFT B-C 23'234" A-C 46'234" A-B 39'111/2" D-2 14'1114" C-1 14'1114" A-2 16'61/2" B-1 16'61/2" D-3 20'51/4" B-4 23'334" A-4 23'334" 20'51/4" LAYOUT DIMENSIONS 1-3 2-3 3-4 15'634' 1-2 18'91/2" 17'7" 17'7" S1-B S1-C S2-B S2-C S3-A S3-B 20'71/4" 13'21/4" 20'51/4" 23'81/2" 20'71/4" 10'101/4" S5-D S4-D S5-A S6-D **S6-A** 14'111/2" 21'¾" 21'¾" 20'10" 18'11¾" 15'7%" S2-S4 7'113/4" S4-S6 S3-S5 8'71/2" S1-S3 10'51/2" 6'4" 33'10%" **L** VAR 15'2" 木 <u>ත</u> PERIMETER 86'1"

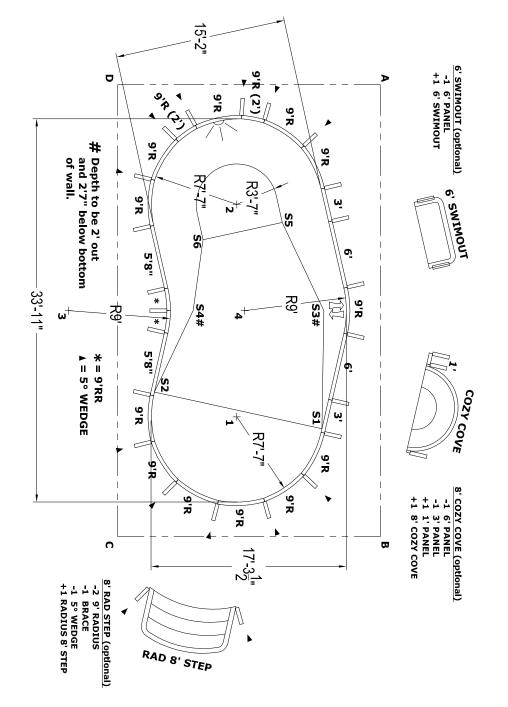

w	33'10¾"	_	٧AR	PERIMETER 86'1"	GALLONS 16,483
D	3'4"	Z	8'2"		
ш	4'8"	M2	1	A	В
т	œ _i	-	15'2"		
വ	7'2"	S	17'3½"	- TI TI -	
I	4'	Z			
Н	4'	P	9'	-H-	K
J	4'	U	9'		

SQ. FOOTAGE

585

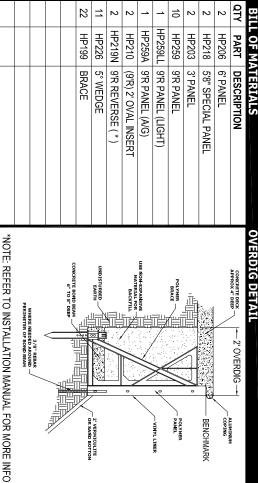

E NON-EXPANSIVE
MATERIAL FOR —
BACKFILL

VINYL LINER

BRACE

APPROX 4" DEEP


-2' OVERDIG-

BENCHMARK

CONCRETE BOND BEAM 6" TO 8" DEEP

2' VERMICULITE OR SAND BOTTOM

7'7"R 5 5 8 7'7"R 7'7"R



NO DIVING WARNING

3/8" REBAR WHERE NEEDED AROUND PERIMETER OF BOND BEAM


COPING LAYOU

It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels are properly installed. 'NO DIVING' WARNING LABELS MUST BE INSTALLED IN NO DIVING AREAS

ACCORDING TO APSP SPECIFICATIONS DANGER

NO DIVING
SHALLOW WATER
DIVING MAY CAUSE DEATH OR PERMANENT INJURY









JAN 2012 CORNERSTONE 15'2" X 34' KIDNEY LEFT

20710-PWH

uocument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12/6/2005 Rev Level: A

3. The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See "Overdig Detail" for excavation around pool.
5. Fill woids under base of panets and tamp well.
6. Depositing with a common panets and tamp well.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply The dealer or contractor who sells or installs your pool is an independant contractor and is not an

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

construction. Proper installation is the responsibility of the dealer/builder/contractor. only to normal ground conditions. There may be additional precautions and/or methods of **EXCAVATION NOTES**

Rough excavation should be 2" deeper in each instance.

Dimensions are from inside pool panels ese are finished dimensions ready for the liner. GENERAL NOTES

Copyright © 2012 by Hydra Pools