
15'2" x 34' KIDNEY RIGHT

A-B 39'111/2" B-C 23'23/4" A-C 46'23/4" A-2 16'61/2" C-1 14'1114" D-2 14'111%" B-1 16'61/2" D-3 20'51/4" C-3 20'51/4" B-4 23'334" A-4 23'334" 1-3 2-3 1-2 3-4 15'63/4" 18'91/2" 17'7" 17'7" S1-B S1-C S2-B S2-C S3-A 20'5¼" 23'8½" 20'71/4" 13'21/4" 10'101/4 20'71/4" S5-A S5-D S4-D S6-D 15'73/4" 14'111/2" 18'1134" 21'¾" 21'¾" 20'10" S3-S5 S2-S4 S1-S3 6'4" 7'11%" 8'71/2" 10'51/2"

LAYOUT DIMENSIONS

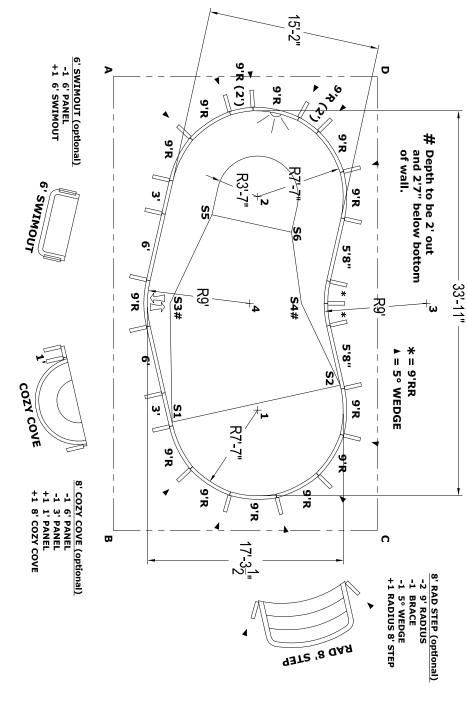

COPING LAYOU

*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.

ATTENTION DEALER/BUILDER: NO DIVING WARNING

G W 33'111%" 3<u>4</u> 48 7'2" 17'31/2" ۷AR 8¦2¦ 15'2" ശ് ဖွ PERIMETER -G---I--86'1" -J--K--**GALLONS** 16,483

IG DETAIL

15'2"

大


ರಾ


SQ. FOOTAGE

587

	BRACE	HP199	22
	5° WEDGE	HP226	11
	HP219N 9'R REVERSE	HP219N	2
	(9'R) 2' OVAL INSERT	HP210	2
_	HP259A 9'R PANEL (A/G)	HP259A	_
	HP259LL 9'R PANEL (LIGHT)	HP259LL	_
	9'R PANEL	HP259	10
	HP203 3' PANEL	HP203	2
	5'8" SPECIAL PANEL	HP218	2
	6' PANEL	HP206	2
	DESCRIPTION	PART	QTY
OVER	BILL OF MATERIALS	L OF MA	31

CONCRETE BOND BEAM 6" TO 8" DEEP APPROX 4" DEEP EARTH POLYMER BRACE 3/8" REBAR WHERE NEEDED AROUND PERIMETER OF BOND BEAM — 2' OVERDIG → 2' VERMICULITE OR SAND BOTTOM PANEL BENCHMARK VINYL LINER

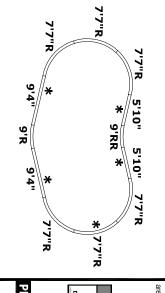

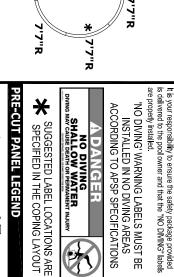



띪

AQUAGENIE



JAN 2012 CORNERSTONE

15'2" X 34' KIDNEY RIGHT

20711-PWH

uocument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12/6/2005 Rev Level: A

The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See "Overdig Detail" for excavation around pool.
5. Fill woids under base of panets and tamp well.
6. Depositing with a common panets and tamp well.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply The dealer or contractor who sells or installs your pool is an independant contractor and is not an

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

construction. Proper installation is the responsibility of the dealer/builder/contractor. only to normal ground conditions. There may be additional precautions and/or methods of **EXCAVATION NOTES**

Rough excavation should be 2" deeper in each instance.

Dimensions are from inside pool panels. ese are finished dimensions ready for the liner. GENERAL NOTES

Copyright © 2012 by Hydra Pools