
20'2" X 40'8" DOUBLE ROMAN END 6" RADIUS

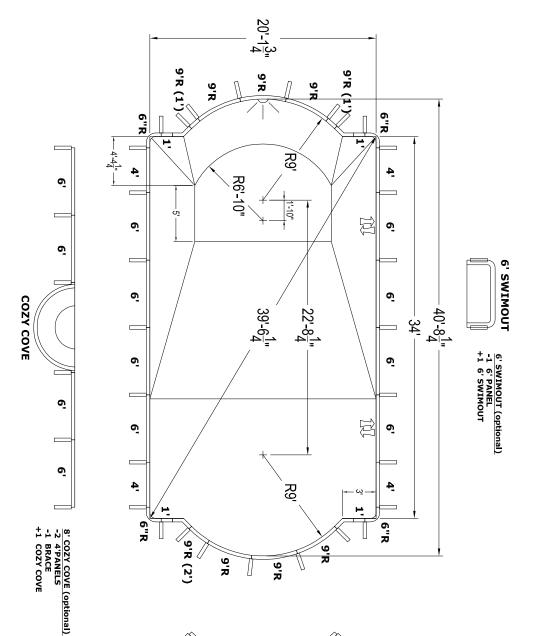

9'R (3')

|HP259LL| 9'R PANEL (LIGHT)

HP259 9'R PANEL

HP210

(9'R) 2' OVAL INSERT

E NON-EXPANSIVE
MATERIAL FOR —
BACKFILL

2' VERMICULITE OR SAND BOTTOM

BRACE

PANEL

VINYL LINE

BENCHMARK

QTY PART

DESCRIPTION

HP204 | 4' PANEL

HP206 6' PANEL

HP201

1' PANEL

BILL OF MATERIALS

OVERDIG DETAIL

APPROX 4" DEEP

--- 2' OVERDIG ---

a

12'1%"

S

U Z

 Ω

-G---I--

-J--K--

3

40'81/4" 20'13/"

PERIMETER 111'6"

SQ. FOOTAGE

GALLONS

25,494 820


8'81/4"

4'8" 3'4"

™2

3

4 4

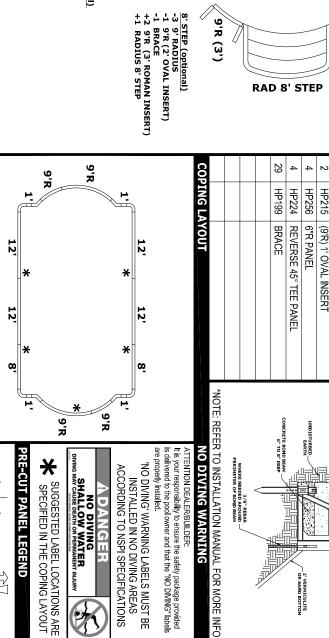

9'R (3')

uvument ID: HF5100, Hydra Standard Panel Layout Drawing Rev Date: 12:6/2005 Rev Level[.] A

Dimensions are from inside pool panels ese are finished dimensions ready for the liner. GENERAL NOTES

. The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill voids under base of panets and tamp well.
6. Backfill with non-expansive material. Rough excavation should be 2" deeper in each instance. THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

EXCAVATION NOTES

The dealer or contractor who sells or installs your pool is an independant contractor and is not an construction. Proper installation is the responsibility of the dealer/builder/contractor. only to normal ground conditions. There may be additional precautions and/or methods of agent of the Manufacturer. The construction methods illustrated here are suggestions and apply

JAN 2012 CORNERSTONE **W**

HGHT

AQUAGENIE

13

20'2" X 40'8" DOUBLE ROMAN END 6" RADIUS 20840-PWH

Copyright © 2012 by Hydra Pools