



Clear
Comfort

Swim Happy.™

CCW100 Pool System

Patented Hydroxyl-Based Advanced Oxidation (AOP)

Clear Comfort's non-chlorine AOP pool treatment delivers the best, easiest & most sustainable swimming experience.

Top 50 Product by Pool & Spa News  25 Most Valuable Product by Aquatics Int'l



- ✓ **BEST-IN-CLASS WATER CARE**
Today's strongest & most advanced AOP pool sanitation method on the market.
- ✓ **HEALTHY & REFRESHING**
Clean, healthy & fresh-feeling water with drinking water chlorine levels or less.
- ✓ **SIMPLE & EFFECTIVE**
Save time & money on effective AOP sanitation that's simple to install & easy to maintain.

How It Works



STEP 1: Air Goes In The System

Clear Comfort's patented process treats Oxygen (O₂), from ambient air.

STEP 2: O₂ Converts Into O₁

The system turns O₂ into Atomic Oxygen (O₁). No additional chemicals are required for this process.

STEP 3: O₁ & Water Form Hydroxyls

O₁ is injected into the pool's circulation system & reacts to the water to create large amounts of powerful Hydroxyl Radicals. Those Hydroxyls rapidly destroy organic materials & contaminants.

Certified to NSF/ANSI 50 • UL E482558

EPA Est. No. 91122-CO-3

System Specifications

Max. Water Flow Rate	90 GPM
Typical Pool Volume	Up to 40,000 Gallons
Dimensions	12" x 8" x 3"
Injection Method	Venturi
Operating Voltage	110 V to 230 V
Power Consumption	10 Watts
Warranty	90-Day Money-Back Guarantee* 5-Year System Warranty 1-Year Cartridge Warranty

* Valid within 90 days of sale.
System must be functional.



Health & Experience


- Drinking water chlorine levels of 0.5 ppm or less
- Clean, crystal clear water quality
- Avoid red eye, skin irritation & odor
- Minimize DBPs (disinfection by-products)
- Reduce 99.99% (4-log) of chlorine-resistant viruses, like Cryptosporidium

Compare Clear Comfort

- Creates more Hydroxyls than any other AOP
- Easy care without UV lamp handling or tools
- An industry-leading 5-year system warranty & 90-day money-back guarantee
- Salt systems produce chlorine
- 2-5X Stronger than other ozone-UV methods

Install & Care

- Easy system maintenance with a 5 min. annual cartridge exchange
- A simple & fast Manifold installation
- Easy for new construction & retrofits
- Easy-to-use indicator lights
- A self-regulating system

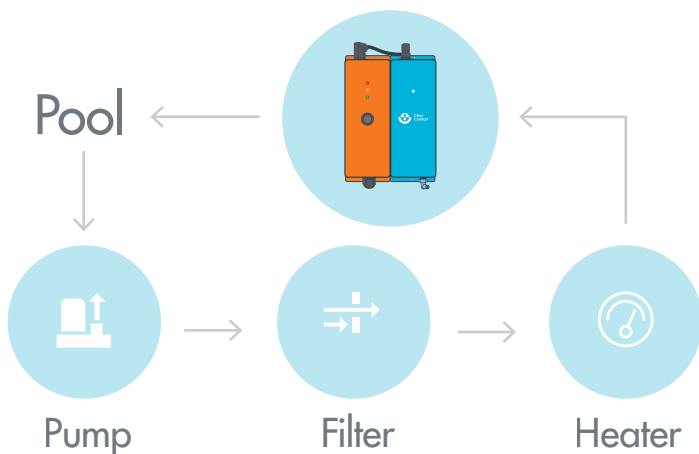

Simple System Integration

- Simple preassembled Manifold that fits into 11 inches of cut pipe
- Fits into most plumbing configurations
- No degas required
- Non-corrosive for equipment & surfaces