

- DIMENSIONS ARE FROM INSIDE POOL PANELS.
- ROPE AND FLOAT ASSEMBLY SHOULD BE INSTALLED IN ACCORDANCE WITH CURRENT ANSI/ASPS/ICC REGULATIONS
- HYDRA LINER TRACK FOR STEPS IS INSTALLED WITH THE BARB FACING THE RISER WALL ON THE STEP.

EXCAVATION NOTES:


- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE.
- SOIL TO HAVE MINIMUM BEARING CAPACITY OF 1500 PSF.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND ELEVATION.
- SEE "OVER DIG DETAIL", IN INSTALLATION MANUAL, FOR EXCAVATION AROUND POOL
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL.
- 10. BACK FILL WITH NON-EXPANSIVE MATERIAL
- 11. FOLLOW ALL CURRENT ANSI / APSP / ICC GUIDELINES FOR RESIDENTIAL POOLS

IMPORTANT NOTES:

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR

ITEM	FILE NAME	DESCRIPTION	DRAWING #		QTY.
1	BOLT, PACK	BOLT, FLANGE, 3/8-16 X 1", PACK (50)	HPS1916	HPS1916	9
2	52IN, BRACE	BRACE, BUTTRESS, 52", 850 SERIES	HPSHTRIBRC	00025945	22
3	52 IN PANEL, RADIUS	PANEL, 14' RADIUS, 2' LONG, 850 SERIES	HPSH14R2	00034529	1
4			HPSH14R4	00034531	18
5	52 IN PANEL, RADIUS	PANEL, 14' RADIUS, 4' LONG, AQUA GENIE, 850 SERIES	HPSH14R4AG	00039422	1
6	52 IN PANEL, RADIUS	PANEL, 14' RADIUS, FULL CIRCLE FILL, 850 SERIES	HPSH14R3116	00034533	1
7	STAKE	STAKE , 14 GA	HPSSTAKE	00003484	22
8	HS510N	STEP, 52" BULLNOSE, STRAIGHT, 6'	HS510N	HS510N	1

	WEIGHT: lbs VOLUME: Inch ³	TOLERANCES DECIMALS: X ± .1	IESSEX DETAILED BY:	10/10/2019 DETAILED DATE: 5/18/2023	SAMSON STEEL
S DRAWING NUMBER:	COLOR: HEAT TREAT: FINISH: TEXTURE:	XXX ± .001 XXXX + .0005	LAST REVISED BY: iessex MATERIAL:	LAST REVISED DATE: 5/18/2023	TITLE: LAYOUT, 28' ROUND, 1- HS510N, 1- AQUA GENIE, 850 SERIES
ENGINEERING DRA 0005056	12020) Ul D.				$\begin{array}{c c} \text{Part number:} & \text{Scale:} \\ \hline 00050567 & \text{SHET:} \\ \hline \text{1 100} & \text{SHET:} \\ \hline \text{1 0F 2} & \text{A} \end{array}$

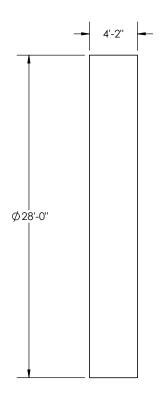

AREA	A PERIMETER	VOLUME
SQ. FT.	FT.	U.S. GALLONS
615.759	87.964	19192.275

NOTES:


- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- DIMENSIONS ARE FROM INSIDE POOL PANELS.
- ROPE AND FLOAT ASSEMBLY SHOULD BE INSTALLED IN ACCORDANCE WITH CURRENT ANSI/ASPS/ICC REGULATIONS
- HYDRA LINER TRACK FOR STEPS IS INSTALLED WITH THE BARB FACING THE RISER WALL ON THE STEP.

EXCAVATION NOTES:

- 5. ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE.
- SOIL TO HAVE MINIMUM BEARING CAPACITY OF 1500 PSF.
- 7. LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND ELEVATION.
- SEE "OVER DIG DETAIL", IN INSTALLATION MANUAL, FOR EXCAVATION AROUND POOL.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL.
- 10. BACK FILL WITH NON-EXPANSIVE MATERIAL.
- 11. FOLLOW ALL CURRENT ANSI / APSP / ICC GUIDELINES FOR RESIDENTIAL POOLS

IMPORTANT NOTES:

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.

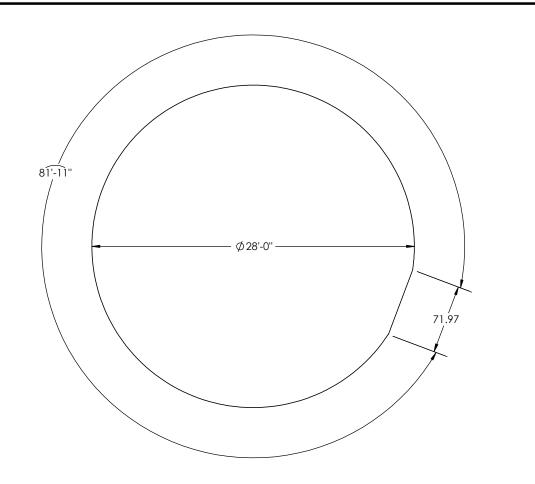

ENGINEERING DRAWING NUMBER: 00050567	VOLUME: Inch ³	TOLERANCES DECIMALS: X ± .1 XX ± .01	IESSEX		DETAILED DATE:	SAMSON STEEL E: TITLE: LAYOUT, 28' ROUND, 1- HS510N, 1- AQUA GENIE, 850 SERIES			
	HEAT TREAT:	XXX ± .001 XXXX ± .0005 ANGULAR: X ± 0.5	iessex 5/18/2023						
	TEXTURE:	THIRD ANGLE PROJECTION							
0005(SIZE:	SHEET: 2 OF 2	SCALE: 1:100	PART NUMBER: 00050567 REV	4		