
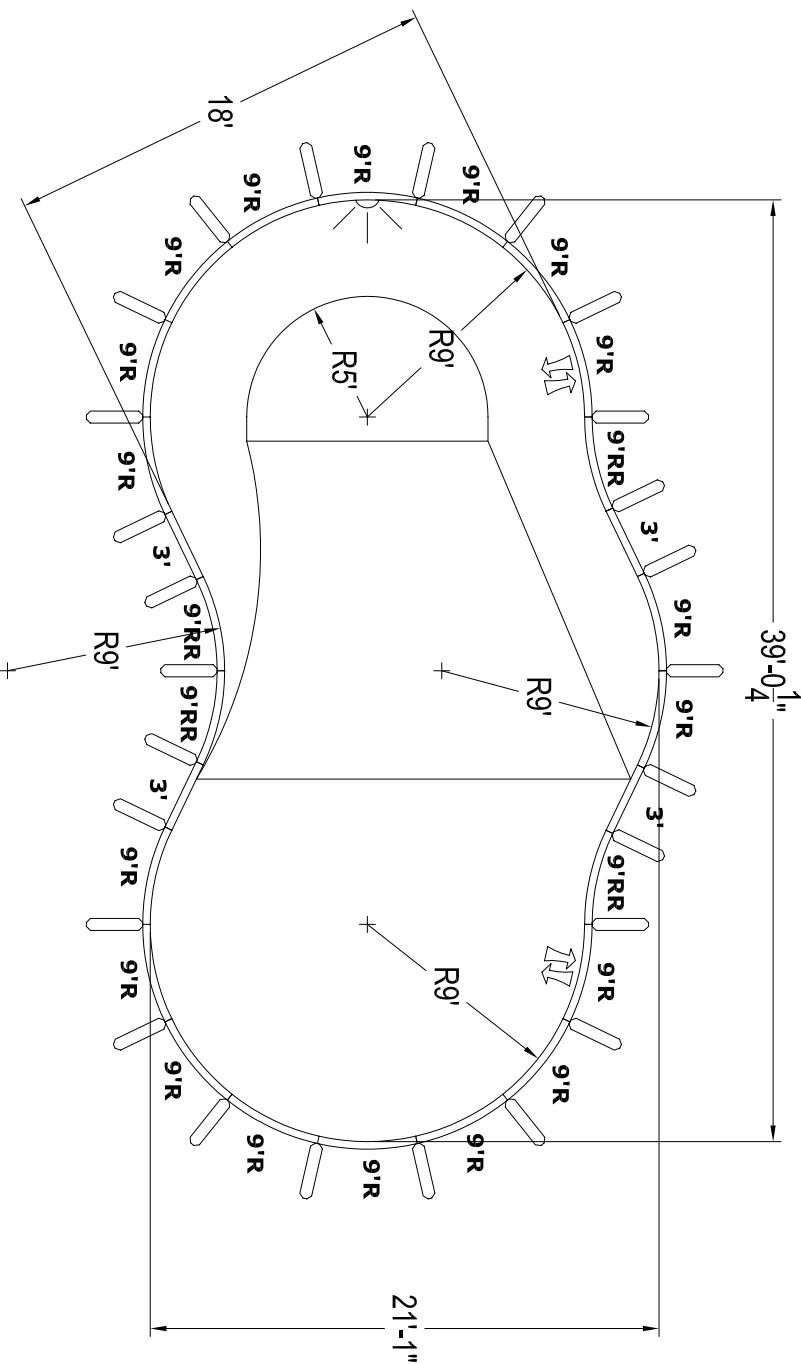


21'-1" X 39'-0 1/4" LAGOON LEFT

| | | | | |
|-------------|---|-----------|----|-----------|
| ACCEPTED BY | A | 18' | K | 6' |
| | B | 39'0 1/4" | L | 14' |
| | D | 3'4" | M | 15'0 1/2" |
| | E | 4'8" | M2 | - |
| | F | 8' | T | - |
| | G | 10' | S | - |
| | H | 4' | N | - |
| | I | 4' | P | - |
| | J | 4' | U | - |

| NSPI TYPE | II | SQ. FOOTAGE | 823 |
|-----------|----|-------------|-----|
|-----------|----|-------------|-----|

| BILL OF MATERIALS | |
|-------------------|---------------------------|
| QTY | PART DESCRIPTION |
| 4 | HP303 3' PANEL |
| 15 | HP369 9' PANEL |
| 1 | HP359LL 9'R PANEL (LIGHT) |
| 2 | HP359A 9'R PANEL (A/G) |
| 4 | HP-19M 9'R REVERSE |
| 26 | HP399 BRACE |

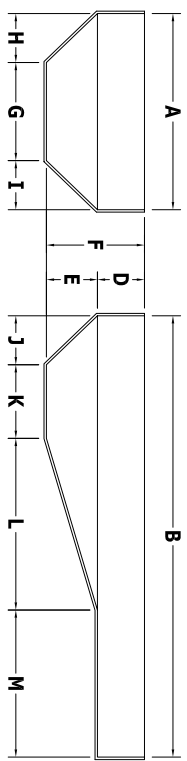

GENERAL NOTES

- These are finished dimensions ready for the liner.
- Dimensions are from inside pool panes.
- The water level should be no more than 6" below the coping receptor (hangtab) slot.

EXCAVATION NOTES


- Rough excavation should be 2" to 3" deeper in each instance.
- Soil to have minimum bearing capacity of 2000 P.S.F.
- Locate top of pool at least 6" above surrounding land elevation.
- See Panel Shell Detail for excavation around pool.
- Fill voids under base of panels and lamp well.
- Backfill with non-expansive material.

ADDITIONAL NOTES

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. The dealer or contractor who sells or installs your pool is an independent contractor and is not an agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of construction. Proper installation is the responsibility of the dealer/contractor.

| | |
|----------------|-------------|
| DATE | MAR 2006 |
| PANEL LINE | CORNERSTONE |
| DRAWING NUMBER | LG121399R8C |

HYDRA POOLS
543 South Main Street - Sweetwater, TN 37874



NO DIVING WARNING
NO DIVING WARNING STICKERS MUST BE INSTALLED IN NO DIVING AREAS ACCORDING TO NSPI SPECIFICATIONS

ADANGER NO DIVING SHALLOW WATER
DIVING MAY CAUSE DEATH OR PERMANENT INJURY

