


# 10' X 60' RECTANGLE 2'RADIUS (LAP POOL)


ACCEPTED BY	A	10'	K	2'	APSP TYPE	0	SQ. FOOTAGE	647
	B	60'	L	56'				
	D	3/4"	M	2'				
	E	1'8"	M2	-				
	F	5'	T	-				
	G	6'	S	-				
	H	2'	N	-				
	I	2'	P	-				
	J	2'	U	-				

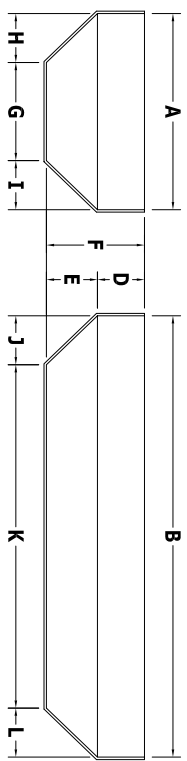

## BILL OF MATERIALS

QTY	PART	DESCRIPTION
12	HP306	6' PANEL
1	HP306L	6' PANEL (LIGHT)
3	HP304	4' PANEL
3	HP304A	4' PANEL (A/G)
2	HP125D	(9'R) 3' ROMAN INSERT
4	HP352M	2'R PANEL
2	HP324	REVERSE 45° TEE PANEL
29	HP399	BRACE
1	HS106N	RADIUS 8' STEP
1	HP386	5'10 1/4" CUSTOM PANEL

## OVERDIG DETAIL

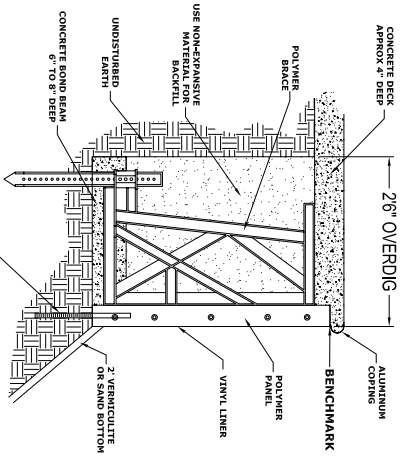

\* NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.

## NO DIVING WARNING

NO DIVING WARNING STICKERS MUST BE INSTALLED IN NO DIVING AREAS ACCORDING TO NSPI SPECIFICATIONS


**ADANGER**

**NO DIVING**

**SHALLOW WATER**

DIVING MAY CAUSE DEATH OR PERMANENT INJURY

## PRE-CUT PANEL LEGEND



543 South Main Street - Sweetwater, TN 37874

PANEL LINE: **CORNERSTONE**

DRAWING NUMBER: **RT10602R5C-LAP**

DATE	JAN 2007
------	----------

## GENERAL NOTES

1. These are finished dimensions ready for the liner.
2. Dimensions are from inside pool panels.
3. The ideal water level should be to the middle of the skimmer opening(s).

## EXCAVATION NOTES

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See Overdig Detail for excavation around pool.
5. Fill voids under base of panels and lamp well.
6. Backfill with non-expansive material.

## ADDITIONAL NOTES

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. The dealer or contractor who sells or installs your pool is an independent contractor and is not an agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of construction. Proper installation is the responsibility of the dealer/contractor.

\*NOTE: THIS IS A NON DIVING POOL. DIVING EQUIPMENT IS STRICTLY PROHIBITED.

