

HCP 2000 SERIES PUMPS

TRISTAR®

The HCP 2000 features the industry's most energy-efficient hydraulics with the 3 to 5 HP pumps providing unmatched performance in semi-commercial applications. Easy to install, service and maintain, TriStar outperforms the competition when it comes to flow, efficiency and value. It's the first to feature a large, ribless strainer basket design that is quick and easy to clean.


- » **2" x 2½" union connections** make installation and servicing fast and easy
- » **Self-priming** (suction lift up to 10' above water level)
- » **Elevated base** ensures better ventilation and protection from flooding
- » **Ribless basket design** ensures easy debris removal. Extra leaf-holding capacity extends time between cleanings
- » **Tri-Lock strainer cover design** seals with less than a quarter turn
- » **3-year** limited warranty
- » **NSF/ANSI Standard 50 Certified**



TECHNICAL SPECIFICATIONS

PART NUMBER	RATED H.P.	VOLTAGE 3-PHASE	AMPS	HZ	WEIGHTED ENERGY FACTOR (WEF)	CARTON WEIGHT (LBS.)	PUMP OUTPUT (GPM) VS. TOTAL RESISTANCE TO FLOW PER FT OF HEAD						
							30	40	50	60	70	80	90
HCP20053	0.5	208-230/460	3.8-3.6/1.8	50/60	4.2	41.0	71	51	31	—	—	—	—
HCP20073	0.75	208-230/460	5-4.6/2.3	50/60	3.4	49.0	94	82	71	55	30	—	—
HCP20103	1.0	208-230/460	6.4-5.8/2.9	50/60	3.0	49.0	121	109	55	79	56	3	—
HCP20153	1.5	208-230/460	6.8-7/3.5	50/60	2.7	49.0	144	137	123	108	91	61	—
HCP20203	2.0	208-230/460	8-8.4/4.2	50/60	2.5	49.0	168	155	142	125	108	80	15
HCP20303	3.0	208-230/460	10.8-11.4/5.7	50/60	2.3	49.0	193	181	168	154	138	117	80
HCP20503	5.0	208-230/460	13.4/6.7	50/60	2.0	65.0	210	205	198	190	172	155	135

PART NUMBER	RATED H.P.	VOLTAGE SINGLE-PHASE	AMPS	HZ	CARTON WEIGHT (LBS.)
SP3250EE	5	208-230	23.2-21.8	60	66.0

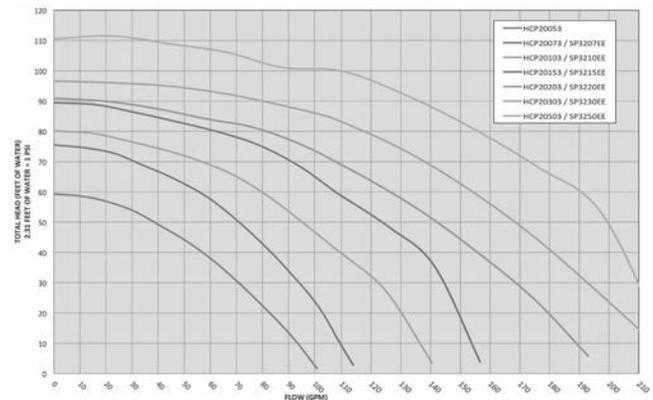

DIMENSIONS

